

VRC-ME-M

ErgoRack, Mercedes Metris

Two Crossbars, Powder Coat Finish
Rack Weight (empty): 103 lbs

*Callouts in this Configuration Overview indicate full module assemblies only.

For details on individual parts, please refer to the linked Module Overviews below.

- A:[FEA-0008 Clamp Down Assembly](#)
- B:[FBM-1015-BLK Mounting System](#)
- C:[CBR-0003 Crossbar Assembly](#)
- D:[FEA-0002 Rotation Assembly](#)
- E:[FEA-0022 Rotation Feature](#)
- F:[FEA-0016 Rotation Driveshaft Feature](#)

[Modular Assembly Manuals](#)


ErgoRack Van—Load specifications:

Check vehicle manufacturer recommendations for roof capacity weight limits.

CROSSBAR SPACING	STEP LADDER	EXT. LADDER
4 ft Spacing	6 – 8 ft.	16 – 20 ft.
5 ft Spacing	8 – 10 ft.	16 – 24 ft.
6 ft Spacing	8 – 12 ft. [†]	16 – 28 ft.
7 ft Spacing	10 – 12 ft. [†]	20 – 32 ft.
8 ft Spacing	10 – 12 ft. [†]	20 – 36 ft.

[†]Rotation Configurations: 12 ft. step ladders require an extended upper add-on component.

**Example shown with 126" Wheelbase Configuration*

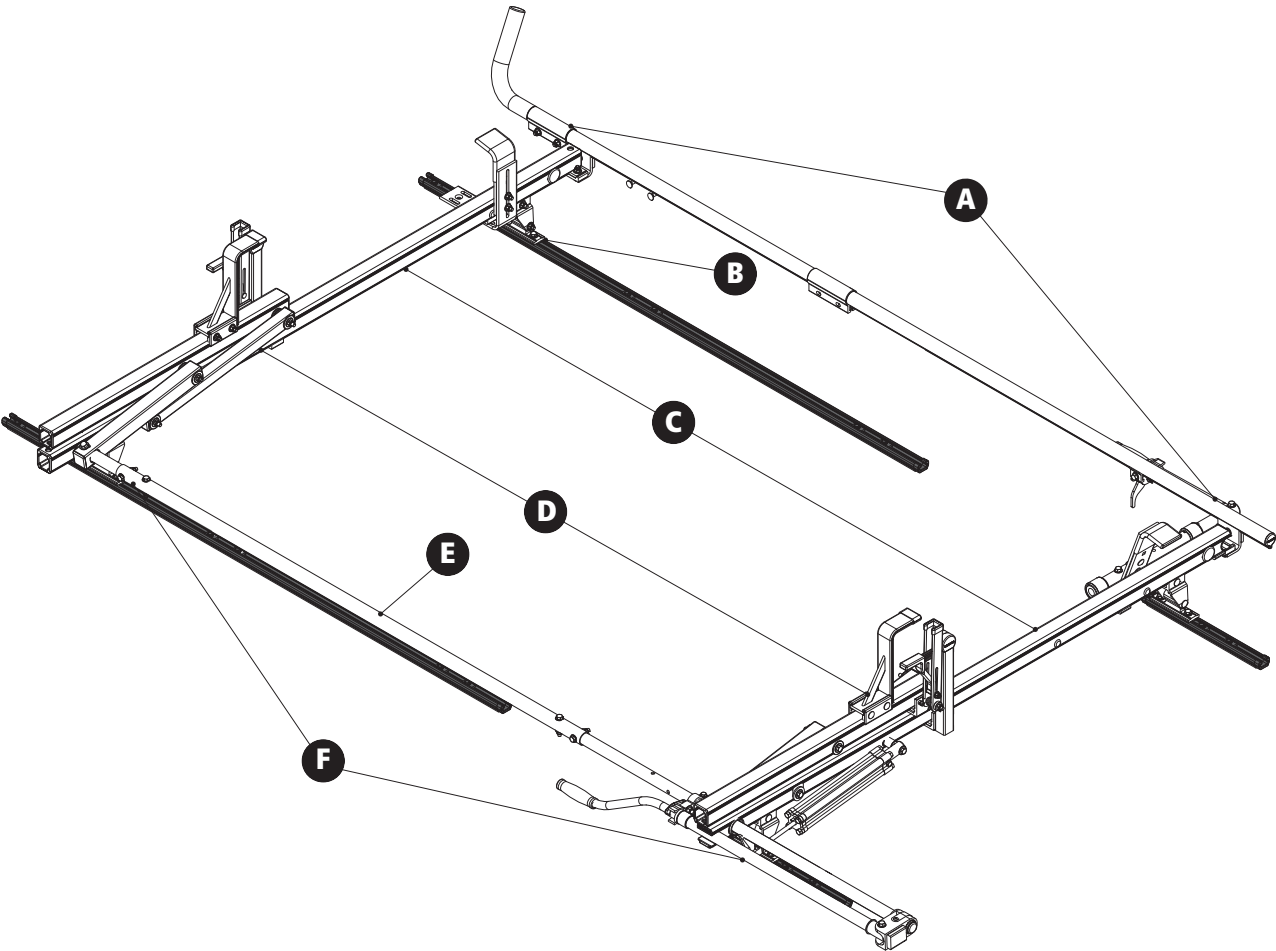

VRC-ME-M

ErgoRack, Mercedes Metris

Approximate dimensions as shown:

All Wheelbases

A: Rack Width	72"
B: Rack Height	17"
C: Rear Crossbar Offset (L&R)	Even
D: Mount Spacing L/R.....	Set at install

126" Wheelbase

E: Total Crossbar Spacing.....	6'–8'
F: Rack Length	120"–122"

135" Wheelbase


G: Total Crossbar Spacing.....	6'–8'
H: Rack Length.....	132"–134"

Compatible Accessories Available

(Sold Separately)



Rear Access Ladder.....	AAL Series
8'–12' Conduit Carriers.....	CON Series
WorkPro LED Lighting.....	LED Series
Systems and Safety Components	RVS Series
Safety monitoring.....	DS2 Series

USOV-VRCMEM-US01 Rev-A 0120

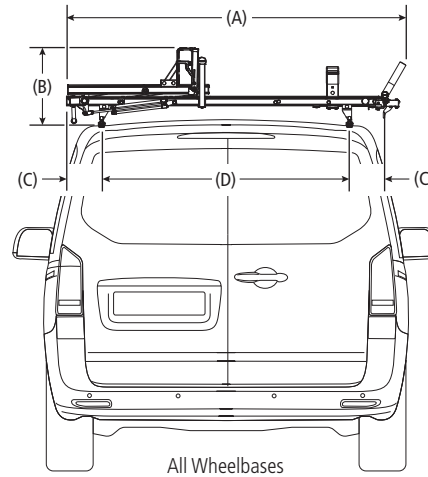


Rear Drive Shaft Offset: 24"

Note: The end of the driveshaft must not extend beyond the vehicle bumper

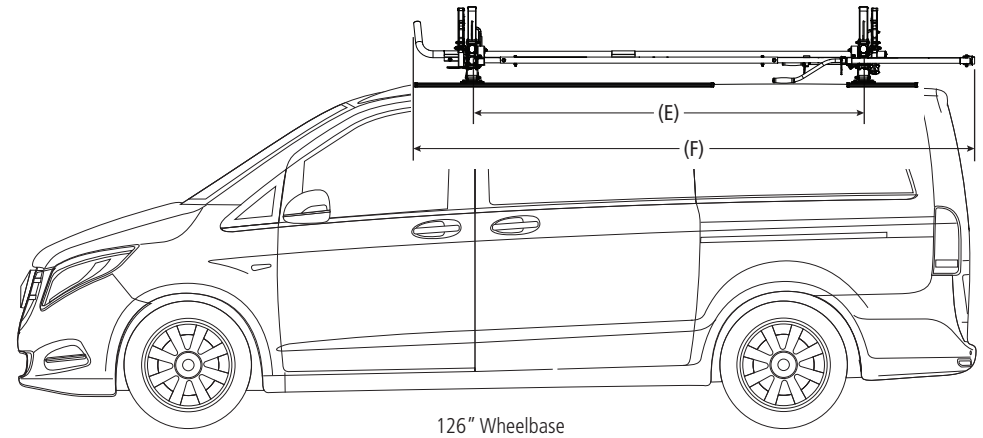

126" Wheelbase

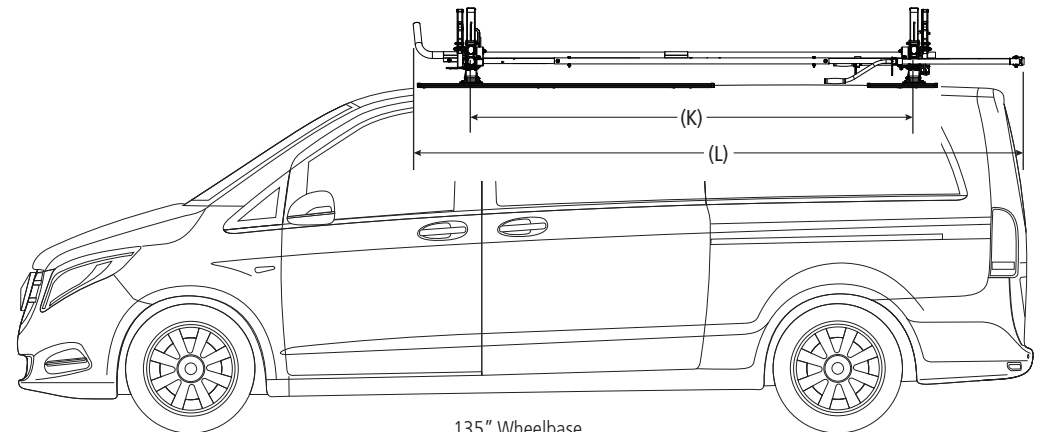

135" Wheelbase