# **RVS-128**

## ADVANCED BLIND SPOT SENSOR SYSTEM



### **FEATURES**

- Microwave Sensor Technology
- Long detection range up to 82ft
- Easy Sensor Installation Surface Mounted
- Visual alerts mount in A-Pillar







#### IN THE BOX

- 1 x Control Module
- 1 x Cable Harness
- 2 x Blind Spot Sensors
- 2 x Rubber Gaskets
- 2 x Sensor Extension Cables

- 2 x LED Indicators
- 2 x LED Extensions Cables
- 1 x GPS Connector
- 1 x Speaker
- 2 x 3M Mounting Tapes



# **RVS-128**






### **SPECIFICATIONS**

Operating Frequency	24.0-24.25GHz
Transmitting Power	15dBm
Detection Angle	40 Degree
Speed Range	0.35mph-137mph
Speed Accuracy	< 0.35mph
Movement Detection	approached or overtaken by vehicle
Detection Range	0-82ft
Operating Voltage	9-32V
Rated Current	<200mA
Working Temperature	-40°C ~ +80°C
Waterproof Radar Sensor	IP67

#### **COMPETITION**

Sensors mounted in rear corners

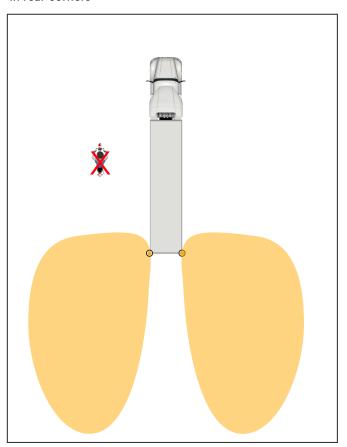

### THE RVS DIFFERENCE

Our sensors mounted in the front of the vehicle



