

VBR-FT-HM

ErgoRack, Ford Transit Low Roof

Two Crossbars, Powder Coat Finish
Rack Weight (empty): 71–77 lbs

*Callouts in this Configuration Overview indicate full module assemblies only.

For details on individual parts, please refer to the linked Module Overviews below.

- A: [FBM-1017-BLK Mounting System](#)
- B: [CBA-3010 Hybrid Crossbar Assembly](#)
- C: [FEA-0015 Rotation Driveshaft Feature](#)

[Modular Assembly Manuals](#)


ErgoRack Van—Load specifications:

Check vehicle manufacturer recommendations for roof capacity weight limits.

CROSSBAR SPACING	STEP LADDER	EXT. LADDER
4 ft Spacing	6 – 8 ft.	16 – 20 ft.
5 ft Spacing	8 – 10 ft.	16 – 24 ft.
6 ft Spacing	8 – 12 ft. [†]	16 – 28 ft.
7 ft Spacing	10 – 12 ft. [†]	20 – 32 ft.
8 ft Spacing	10 – 12 ft. [†]	20 – 36 ft.

[†]Rotation Configurations: 12 ft. step ladders require an extended upper add-on component.

*Example shown with 130" Wheelbase Configuration

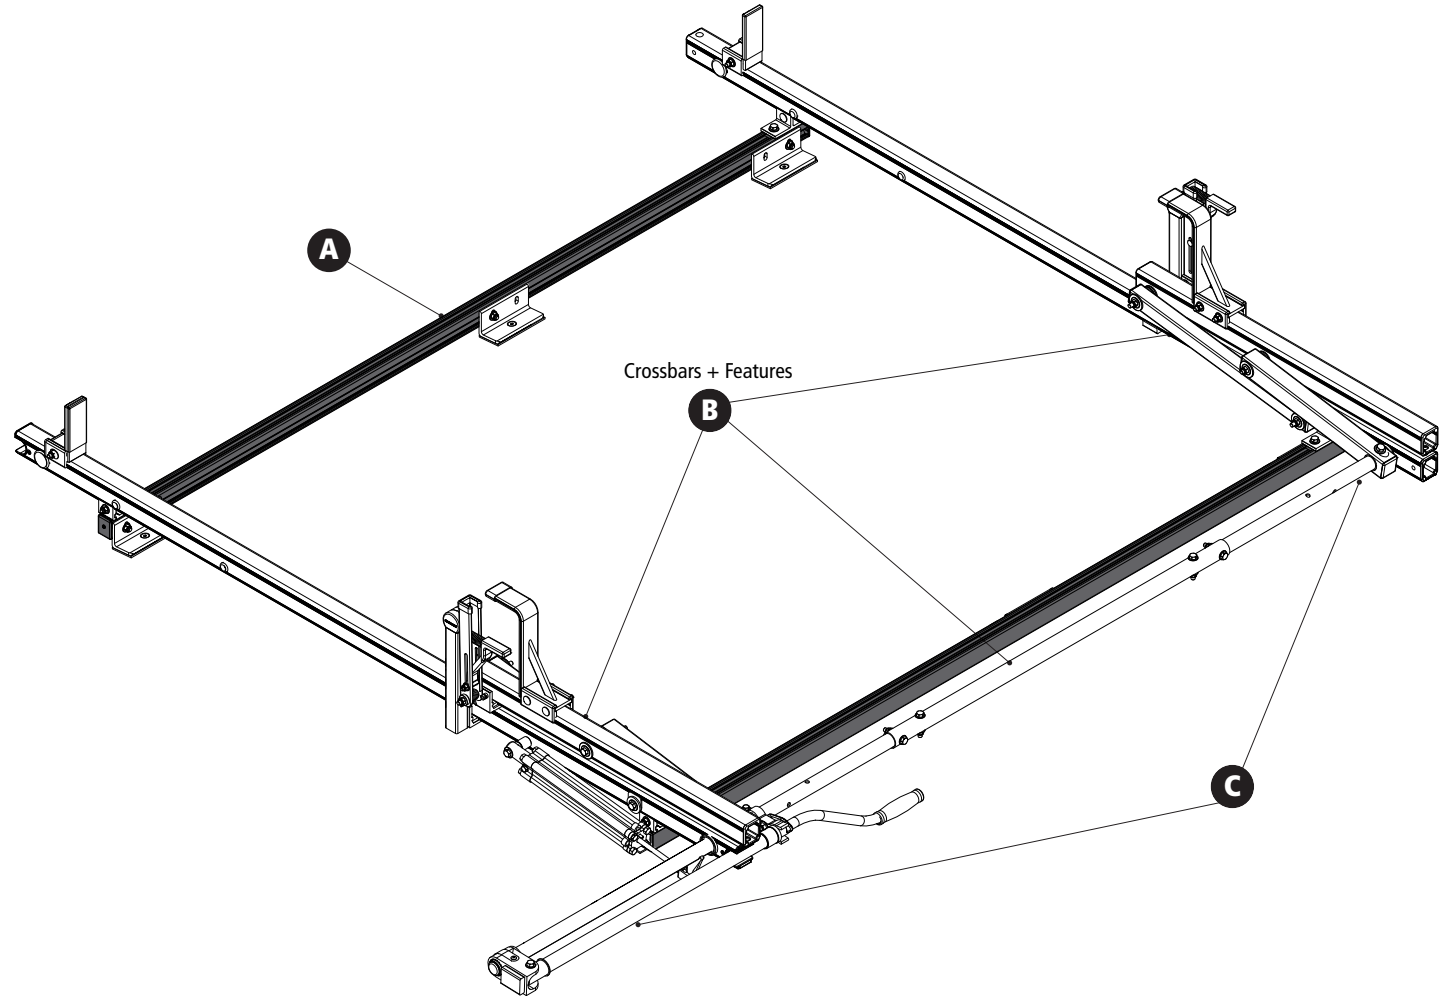

VBR-FT-HM

ErgoRack, Ford Transit Low Roof

Approximate dimensions as shown:

All Wheelbases

- A: Rack Width 78"
- B: Rack Height 16"
- C: Rear Crossbar Offset (Left)..... 10.25"
- D: Mount Bolt Spacing L/R..... 56"

130" Wheelbase

- E: Total Crossbar Spacing..... 6'
- F: Rack Length 100"

148" Wheelbase

- G: Total Crossbar Spacing *6'–8'
- H: Rack Length..... 124"


*5' Connecting Bars (sold separately) are required for spacings that exceed 6'—contact Sales & Service.

- 3' Connecting Bar (Included in current configuration)
- 5' Connecting Bar (Sold separately)


Compatible Accessories Available

(Sold Separately)


- 5' Rotation Connecting Bar [FEA-0022](#)
- Retractable Ratchet Tie-Down..... [ACC-8000](#)
- Rear Access Ladder..... [AAL Series](#)
- 8'–12' Conduit Carriers..... [CON Series](#)
- WorkPro LED Lighting..... [LED Series](#)
- Systems and Safety Components [RVS Series](#)
- Safety monitoring..... [DS2 Series](#)

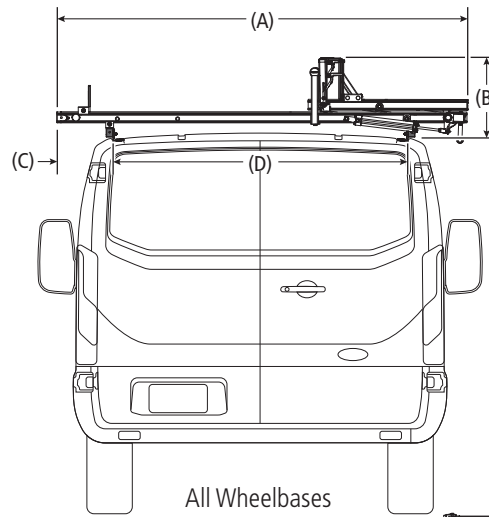


All Wheelbases

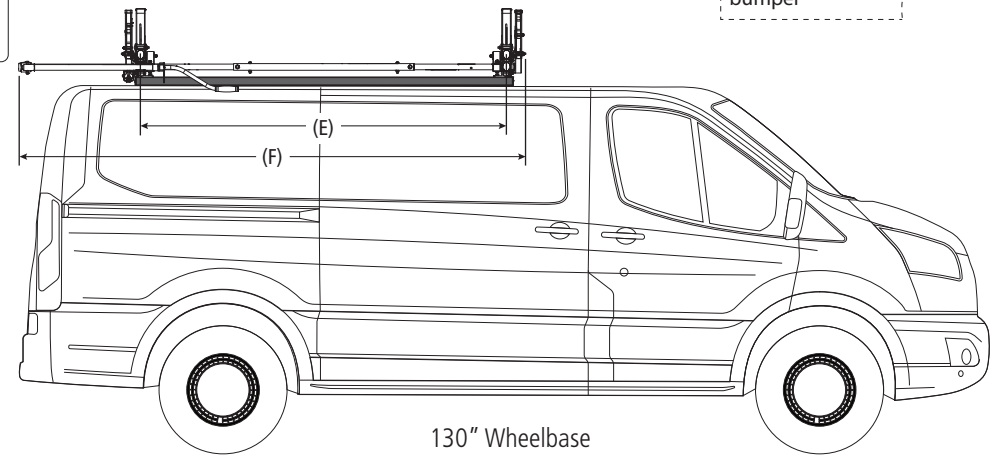

130" Wheelbase

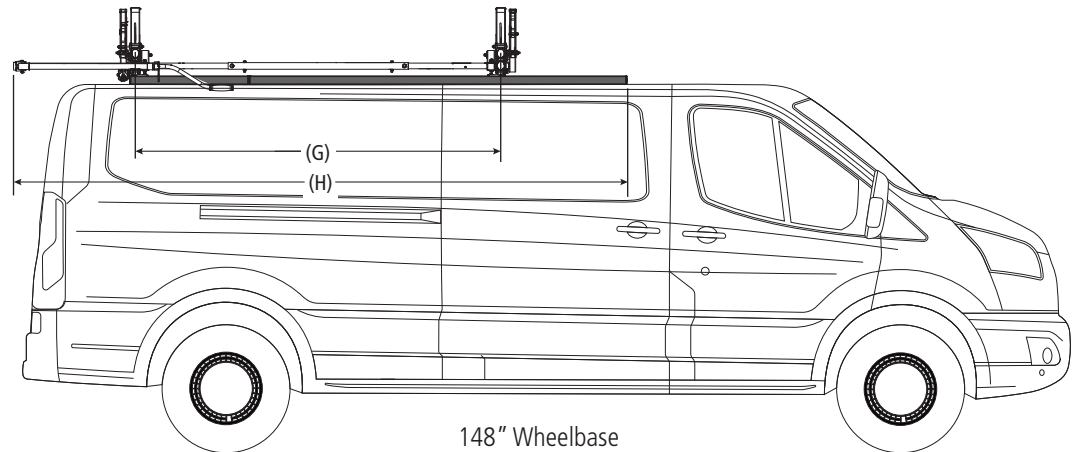

148" Wheelbase

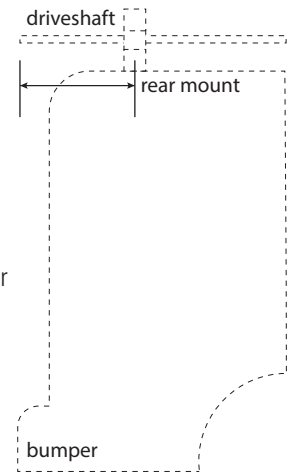

Rear Drive Shaft Offset: 24"

Note: The end of the driveshaft must not extend beyond the vehicle bumper