


PRIME DESIGN™


A Safe Fleet Brand

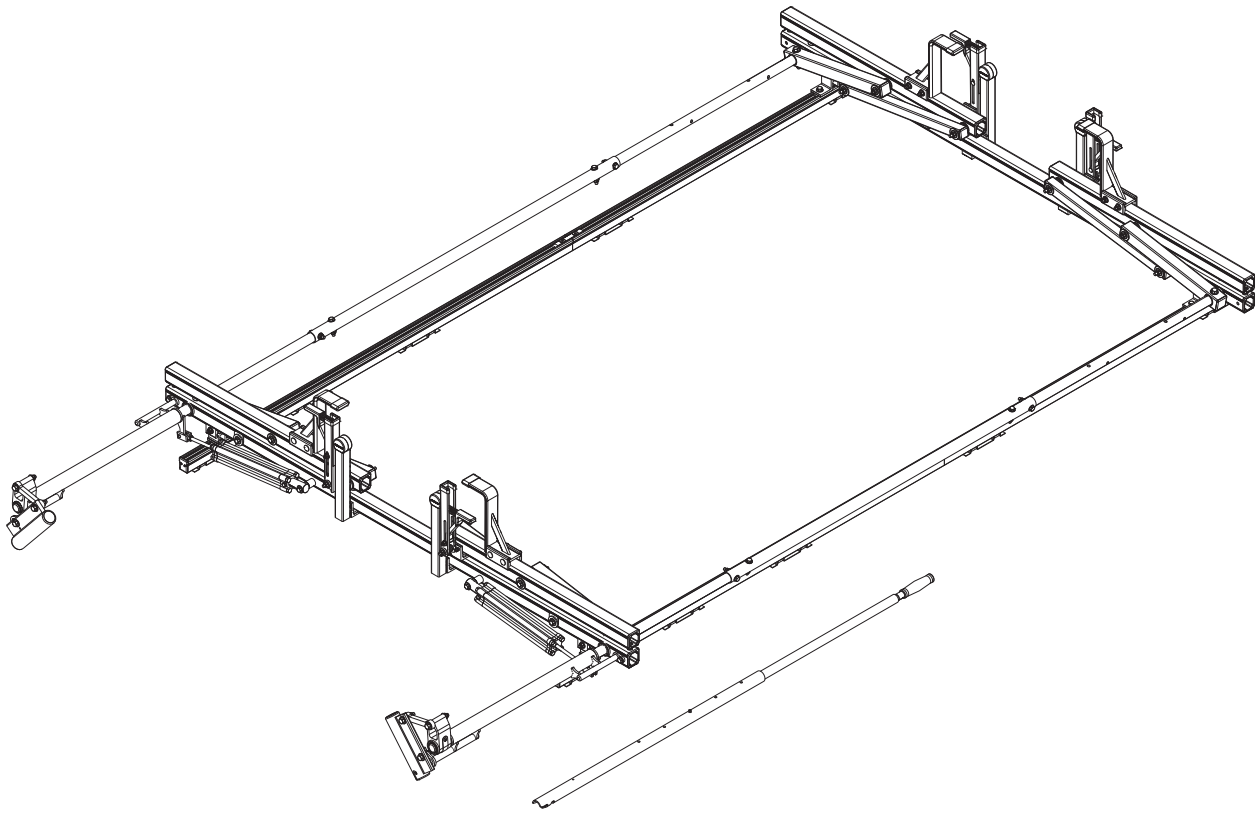

WINB


HRR

CONTENTS OVERVIEW

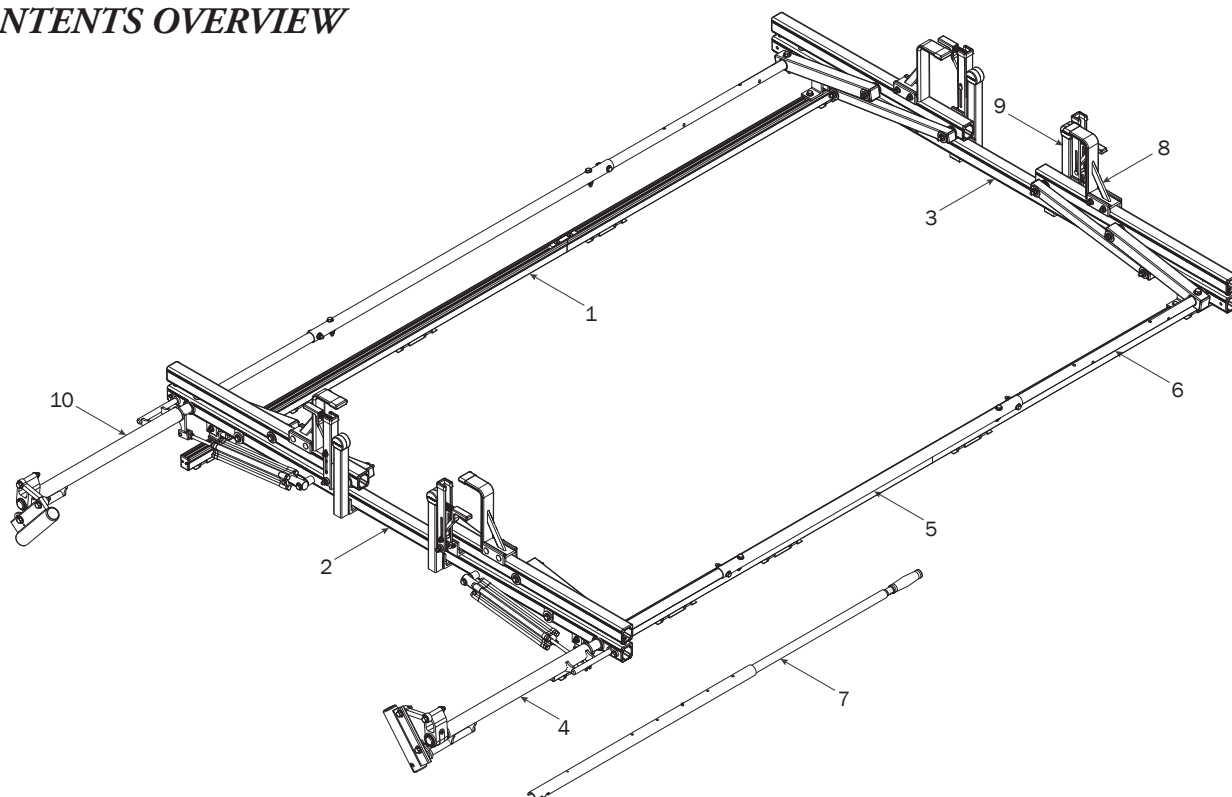


1—FBM-0048 (Qty 1)
Channels with hardware


Channels (2X)

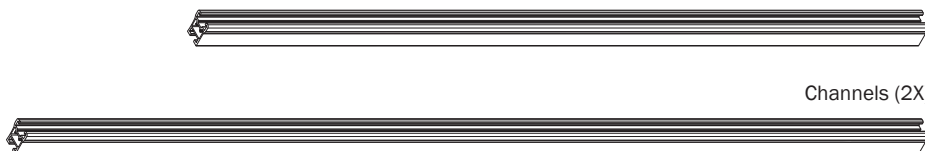


Channels (2X)




M8 x 45MM Bolt (2X)




M8 x 20MM (18X)



Square Nut (20X)



T Slot Insert (18X)



Channel Strip (2X)



Brackets (4X)



Top Connector (2X)




Bottom Connector (2X)



End Caps (4X)




Screws (8X)




M8 x 40MM Bolt (2X)


2—Rear Crossbar Assembly (Qty 1)

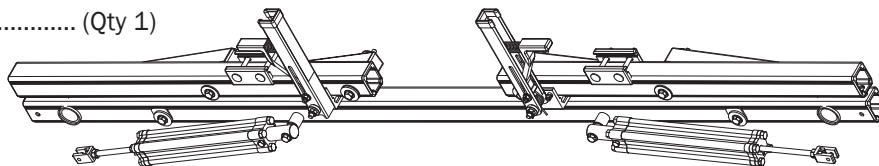

3—Front Crossbar Assembly (Qty 1)

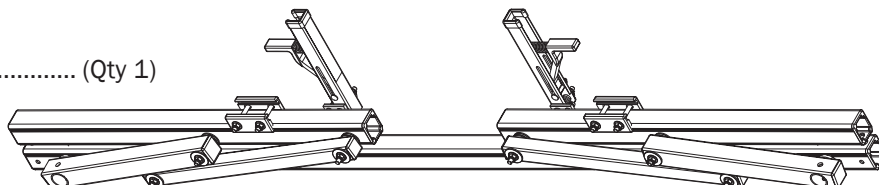


4—Rear Drive Shaft (Qty 1)
Right Hand, A Version, 50.00"

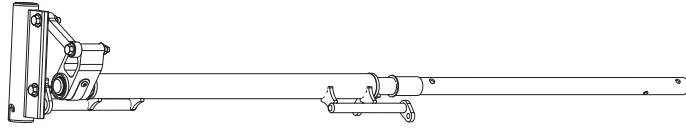

5—Connecting Bar (Qty 2)
48.00"




6—Front Drive Shaft (Qty 2)
B Version, 35.75"




7—HRR Removeable Handle Assembly (Qty 1)




8—Z Post (Qty 4)
Adjustable, 7.25"




9—L Post (Qty 4)
Gen2, Roller Cap, 9.25"




10—Rear Drive Shaft (Qty 1)
Left Hand, A Version, 50.00"

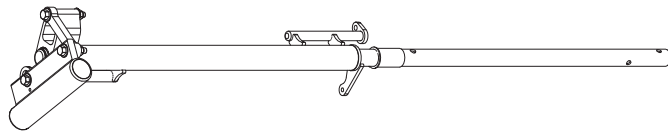


11—HKT-8163 (Not called out in Overview)..... (Qty 2)




M8 x 25MM (1X)




M8 x 50MM (4X)



3/8" x 2.25" (2X)




Cotter Pin (1X)




Clevis Pin (1X)




M8 Lock Nut (5X)




3/8" Lock Nut (2X)



5/16" Flat Washer (10X)




3/8" Flat Washer (4X)

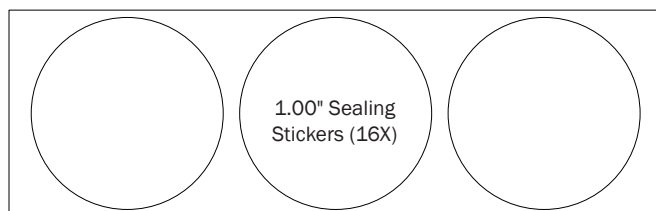





1.00" Sealing
Stickers (16X)




Anti-Seize (2X)







Lubricant (2X)

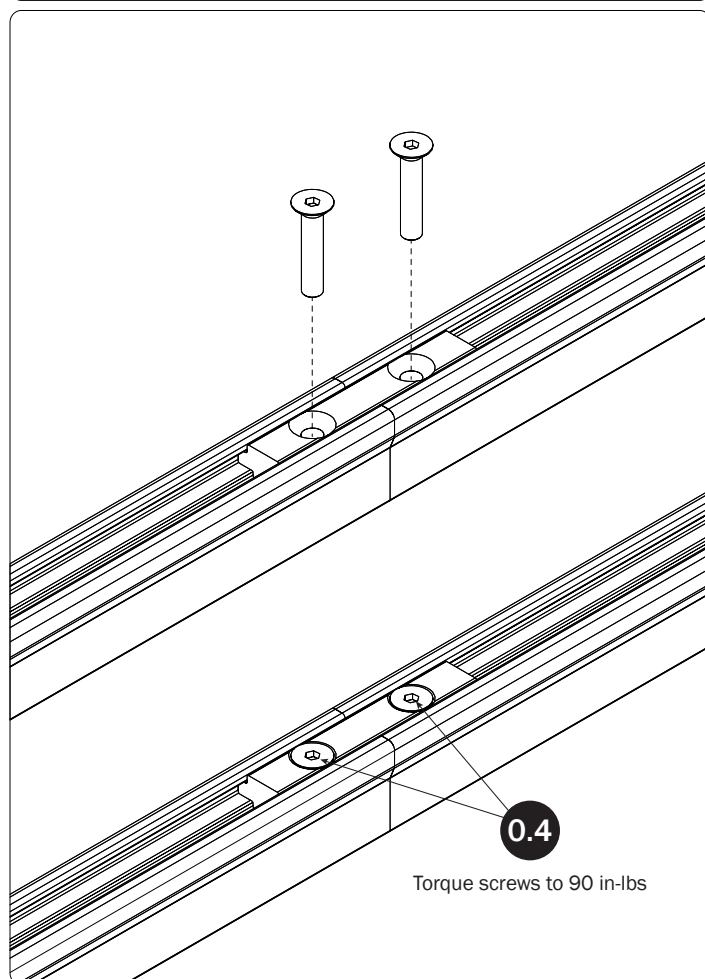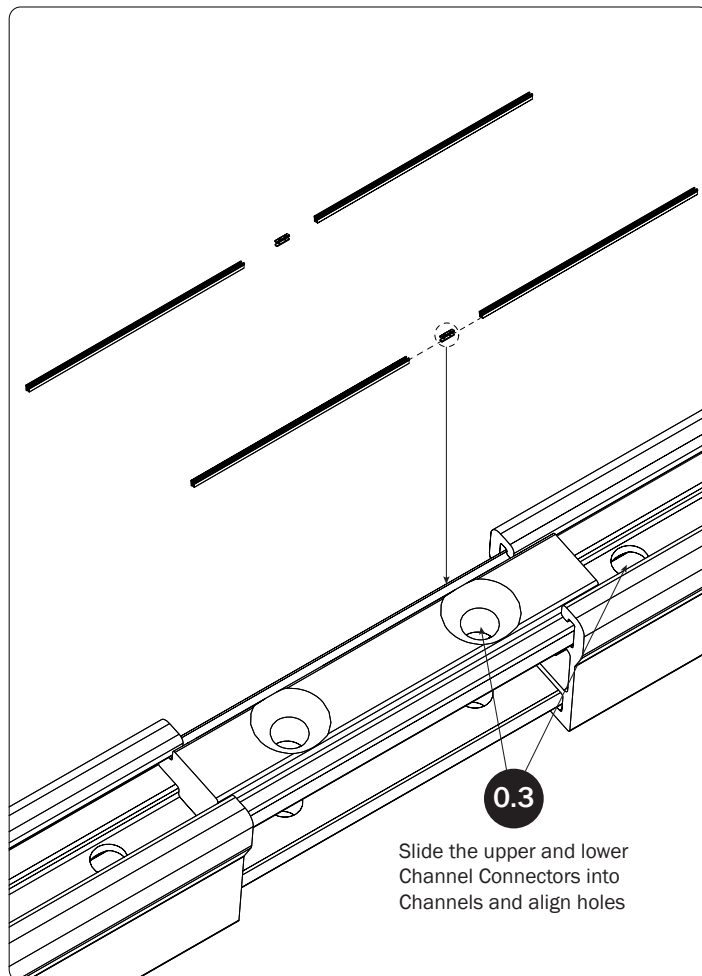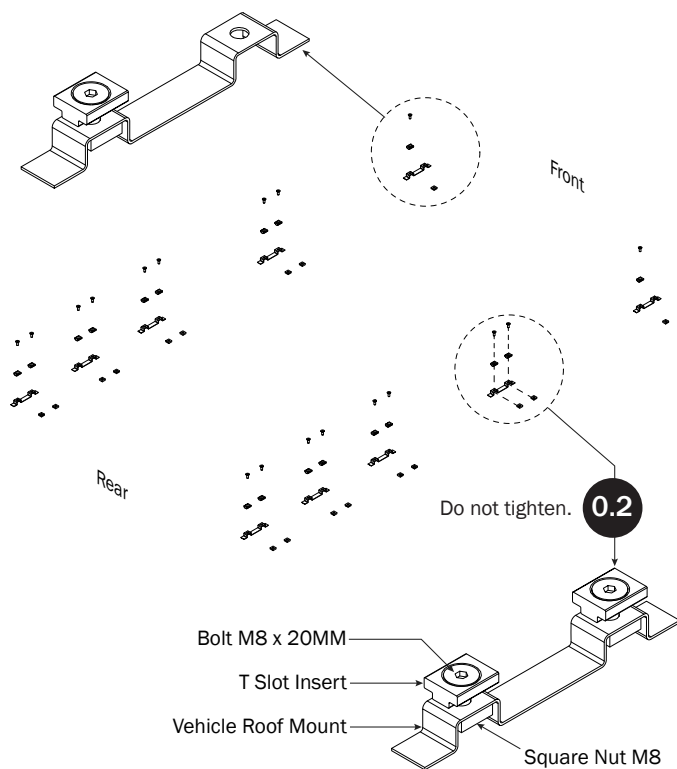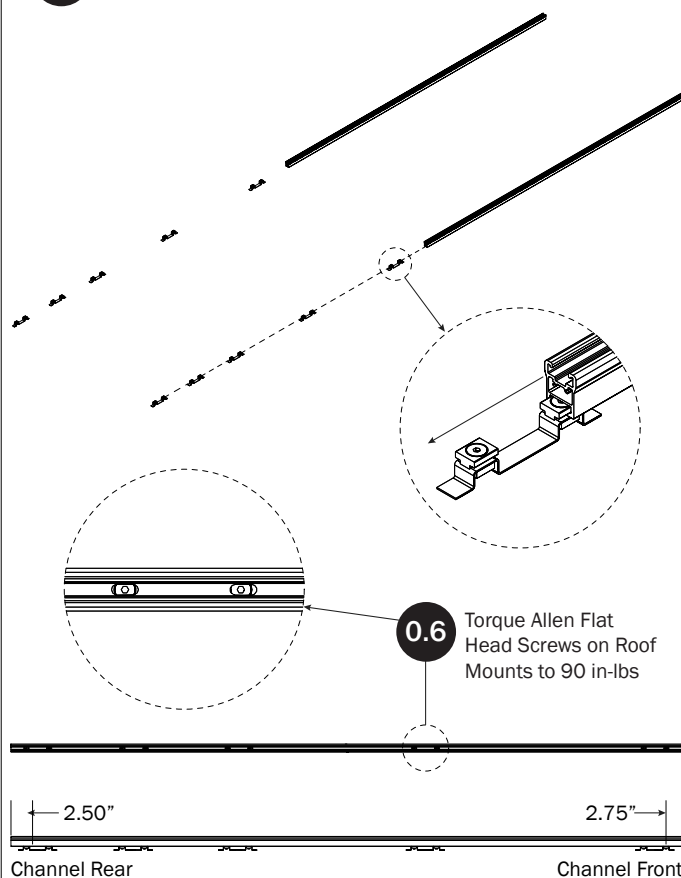FBM-0048 MOUNTING SYSTEM
CHANNELS TO ROOF**0.1** Assemble Mounts as shown below.**0.5** Slide Channels onto roof Mounts and set distances as shown.


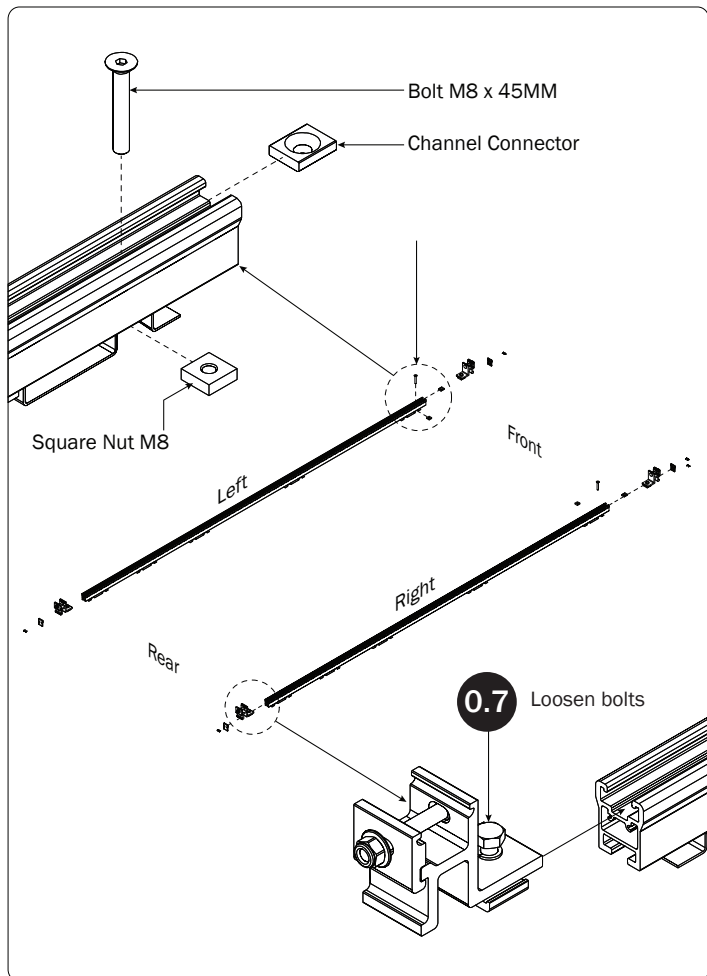


0.8 Finger-tighten to retain positions. Do not torque until Step 1.2

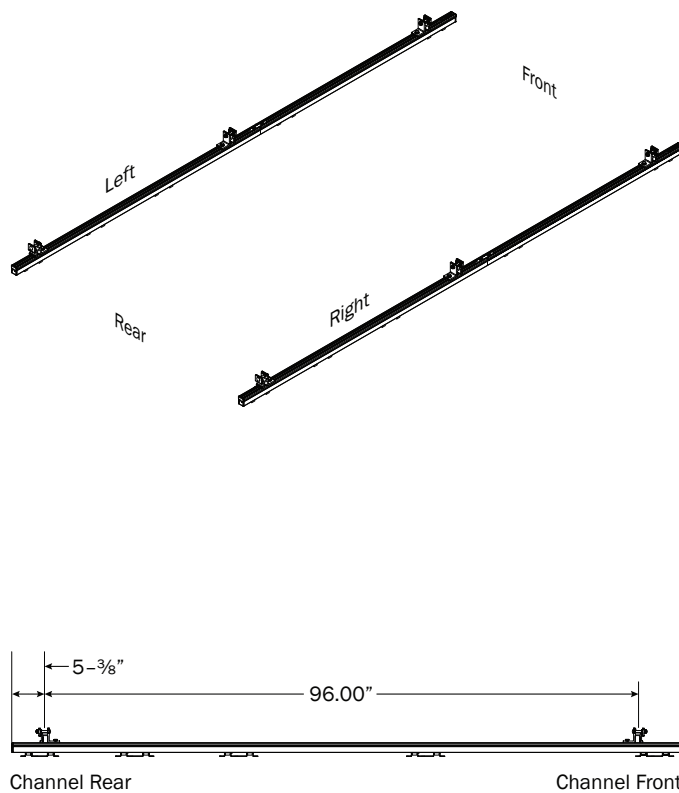


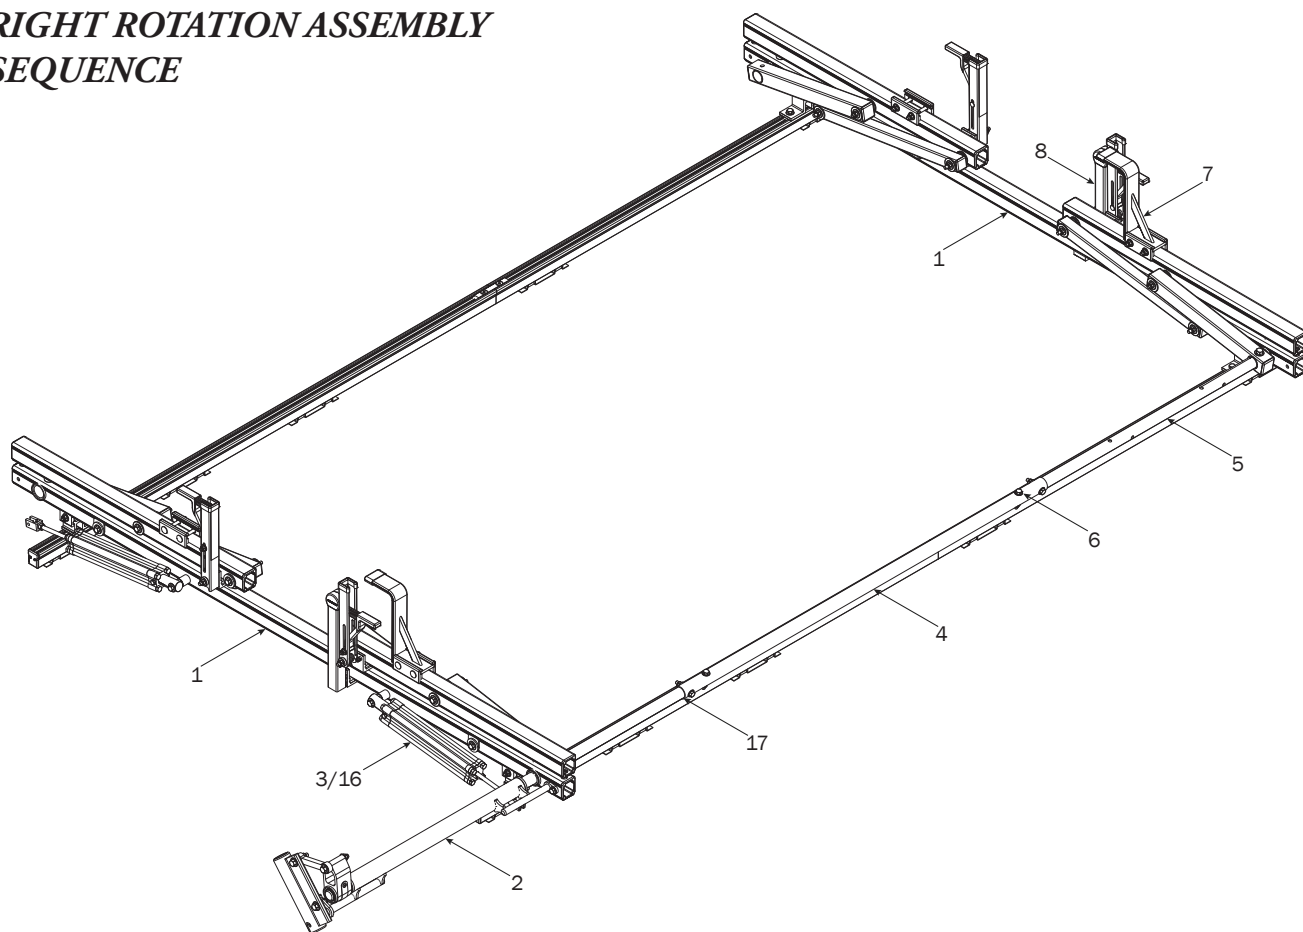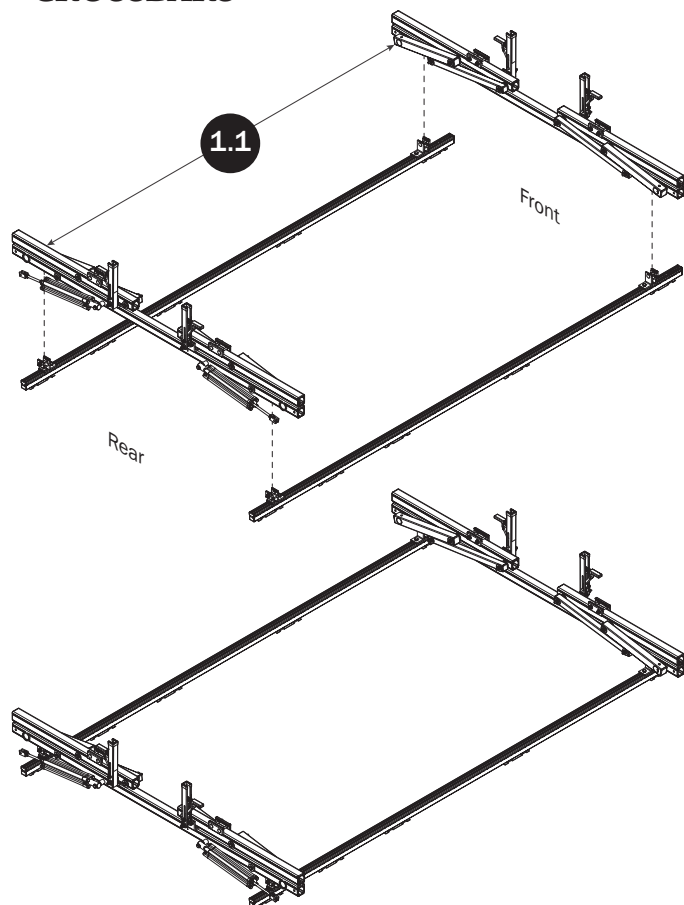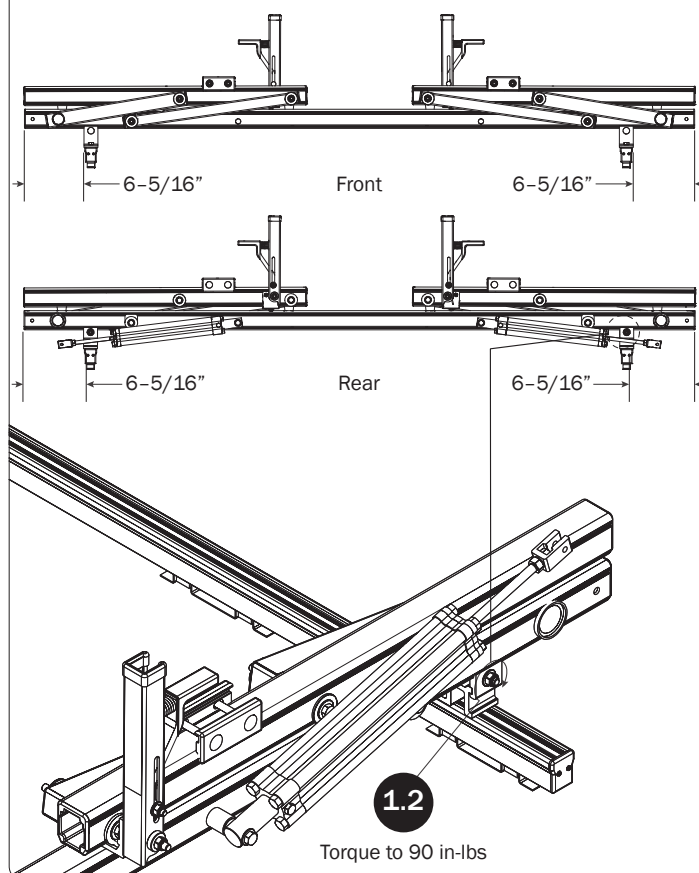**RIGHT ROTATION ASSEMBLY
SEQUENCE****CROSSBARS****CROSSBAR ADJUSTMENT**


REAR DRIVE SHAFT

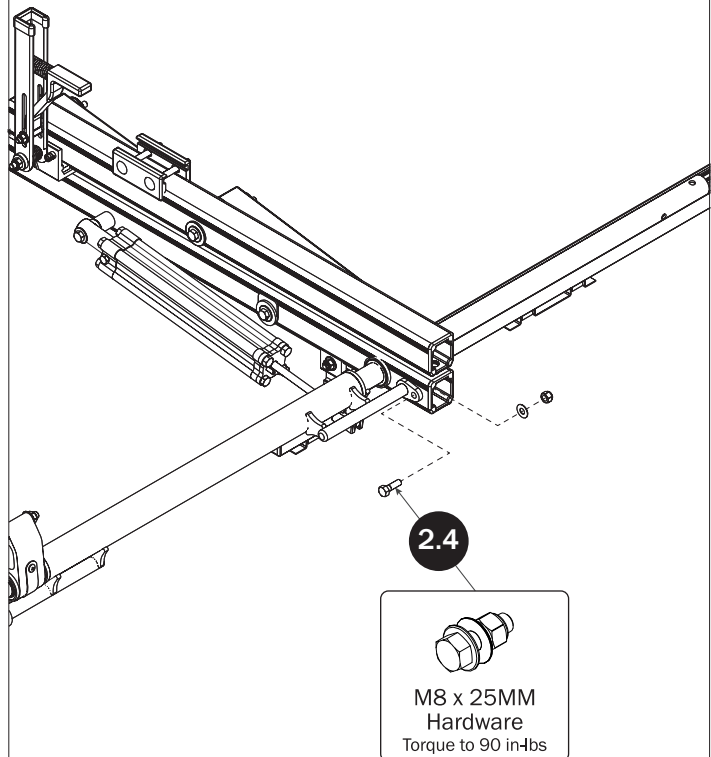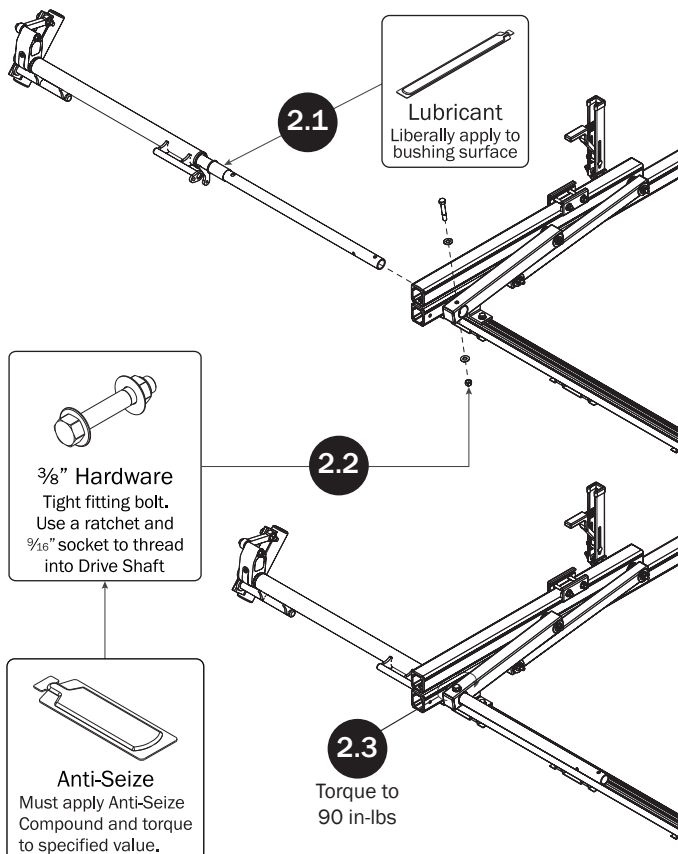


CYLINDER HARDWARE

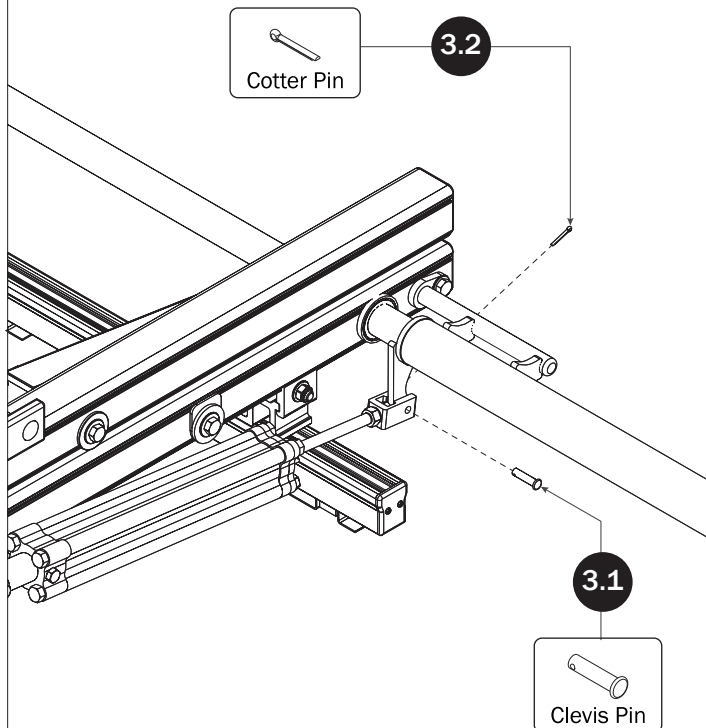


CONNECTING BAR

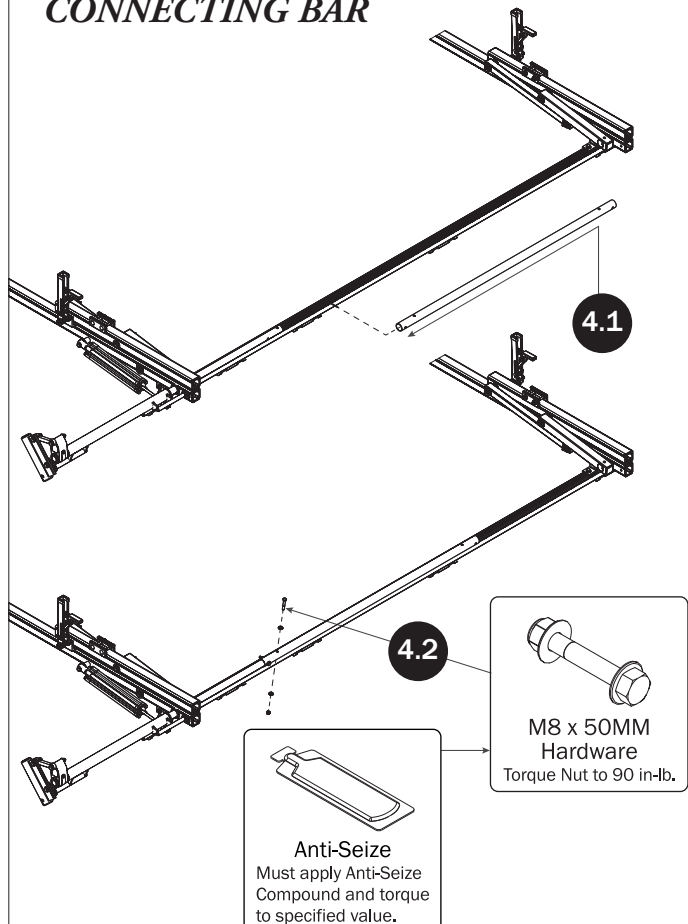


FRONT DRIVE SHAFT

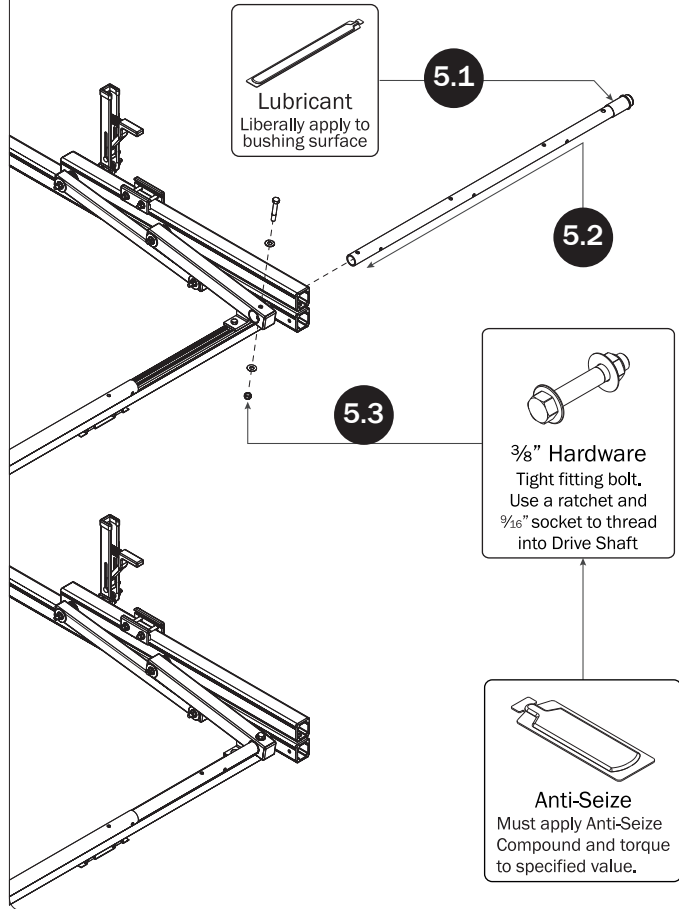


CONNECTING BAR FASTENERS

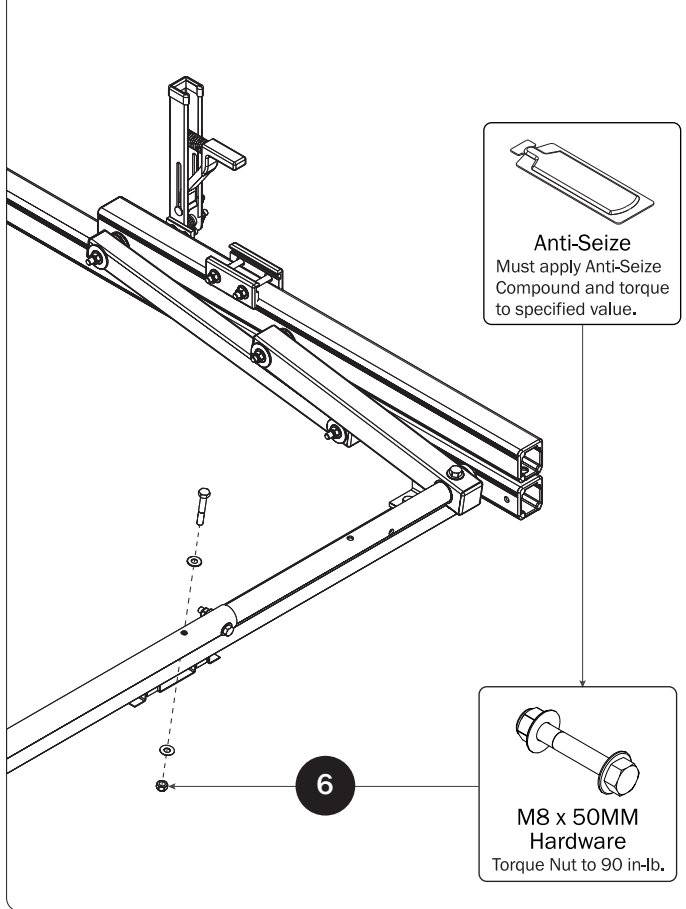


Z POST SEE QUICK START GUIDE FOR ADJUSTMENTS

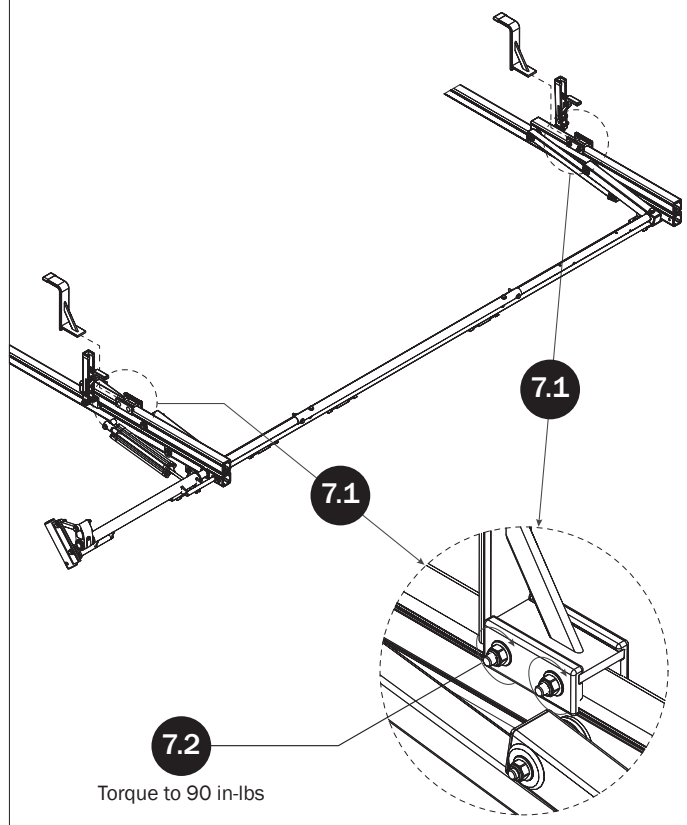



L POST SEE QUICK START GUIDE FOR ADJUSTMENTS




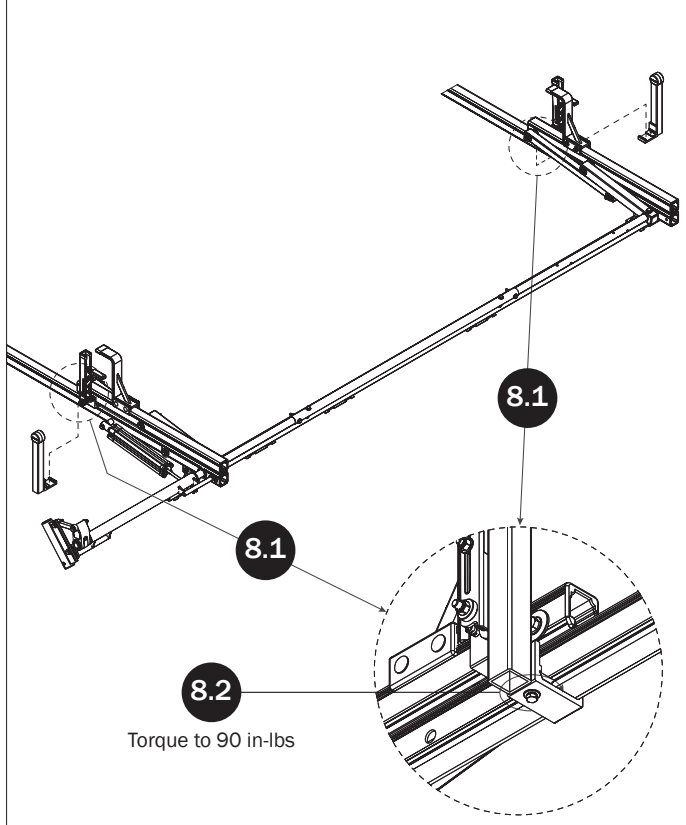


LEFT ROTATION ASSEMBLY SEQUENCE

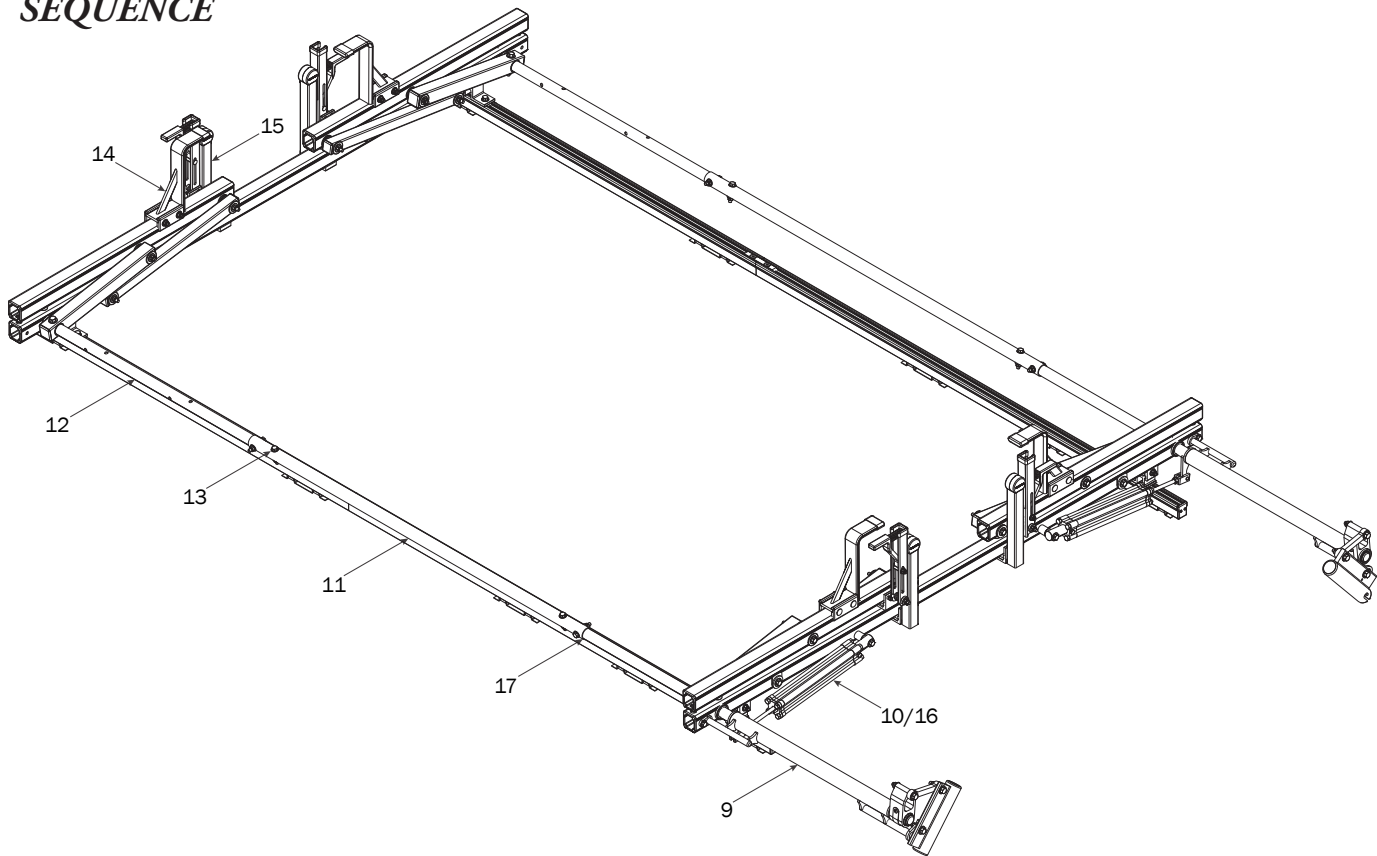


REAR DRIVE SHAFT

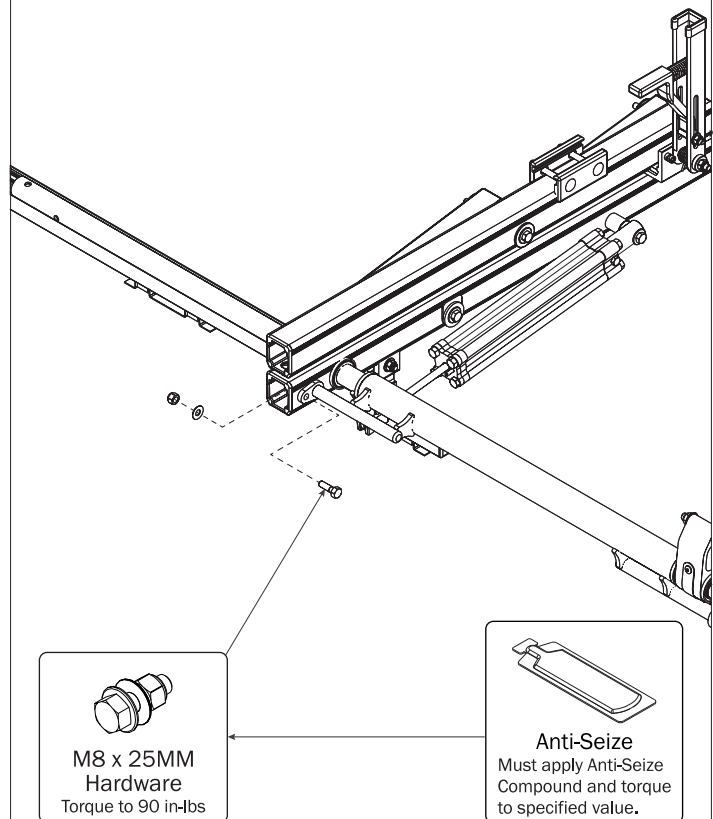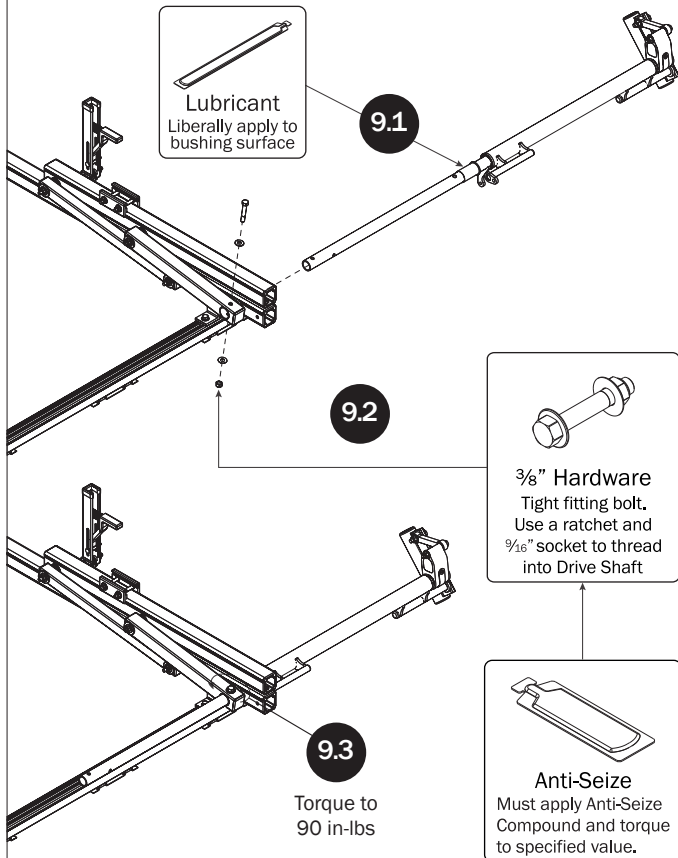

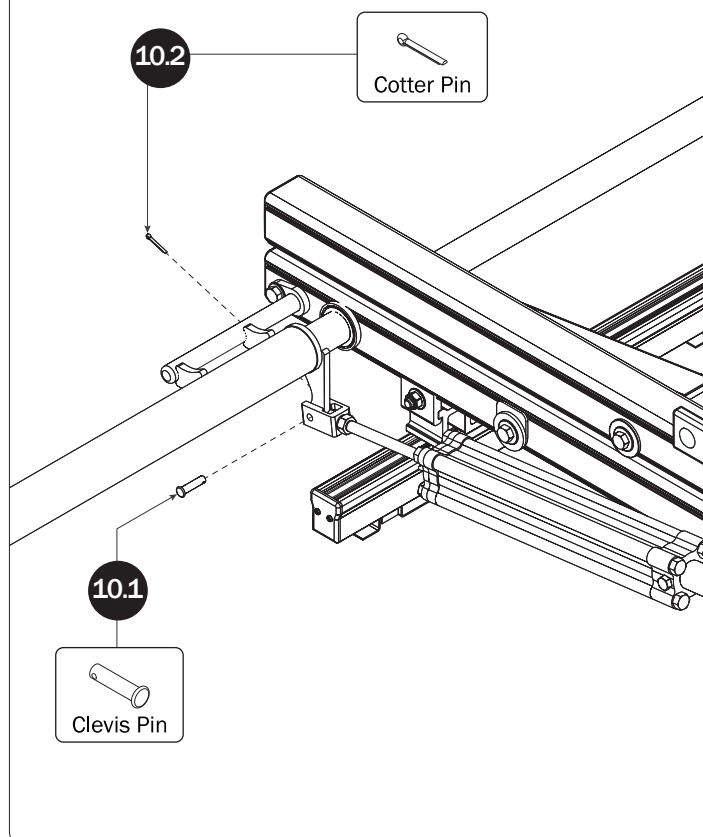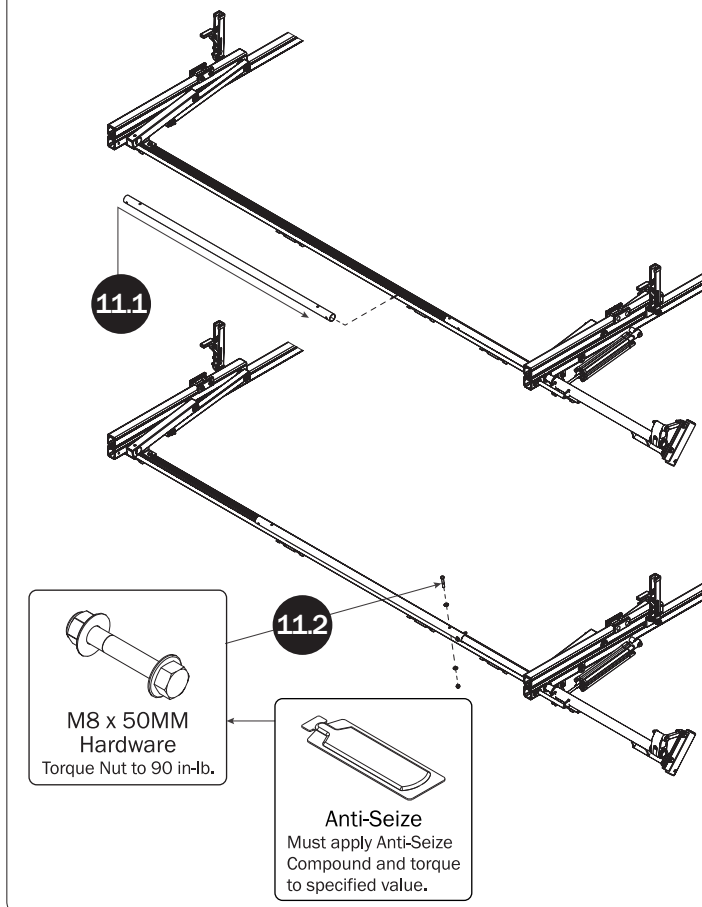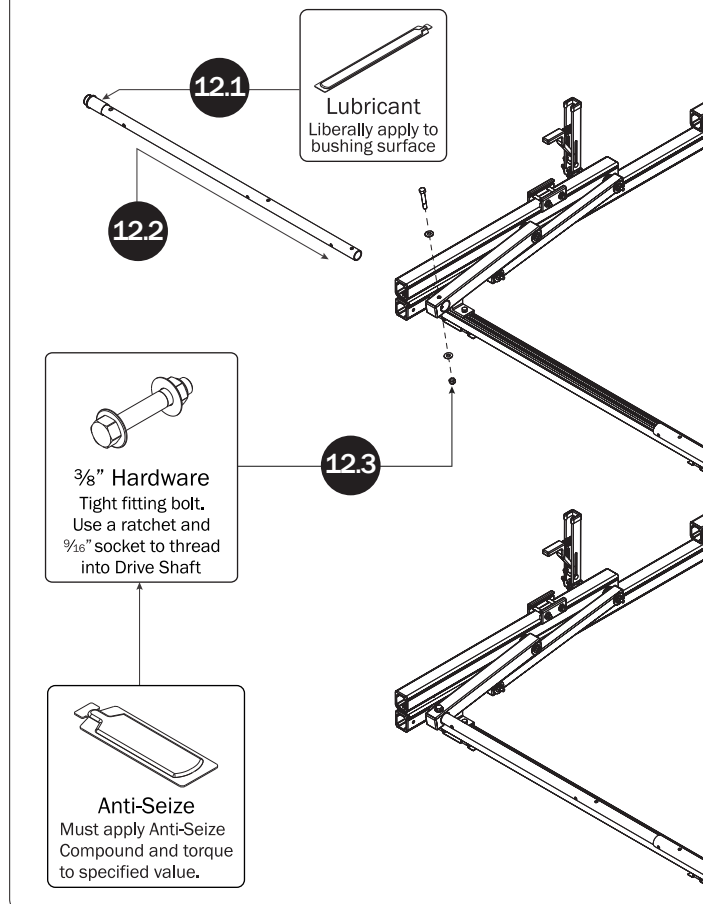
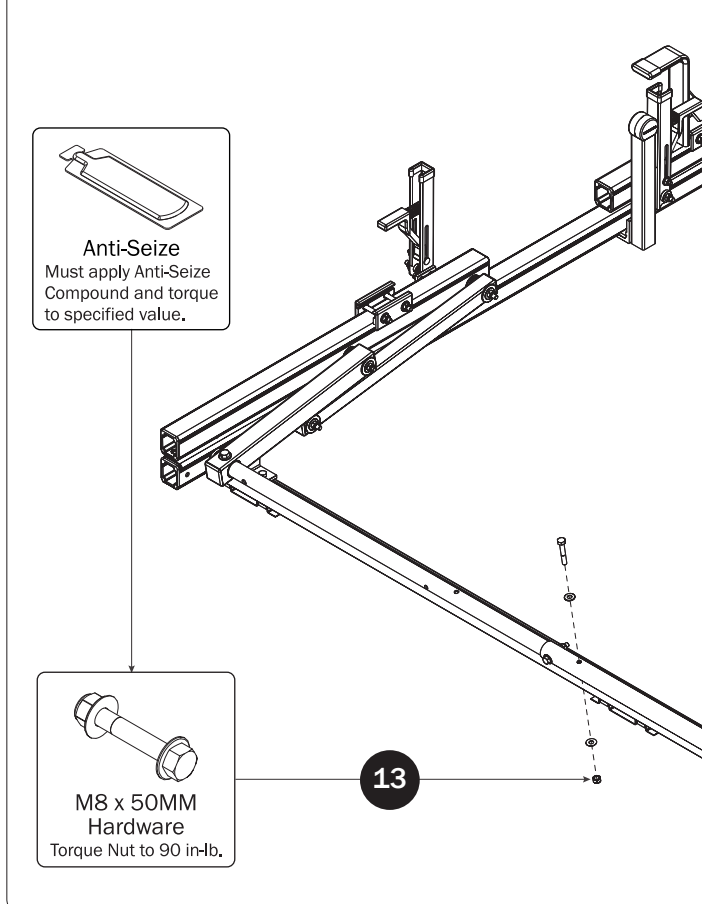
CYLINDER HARDWARE**CONNECTING BAR****FRONT DRIVE SHAFT****CONNECTING BAR FASTENERS**



Z POSTS

SEE QUICK START GUIDE FOR ADJUSTMENTS

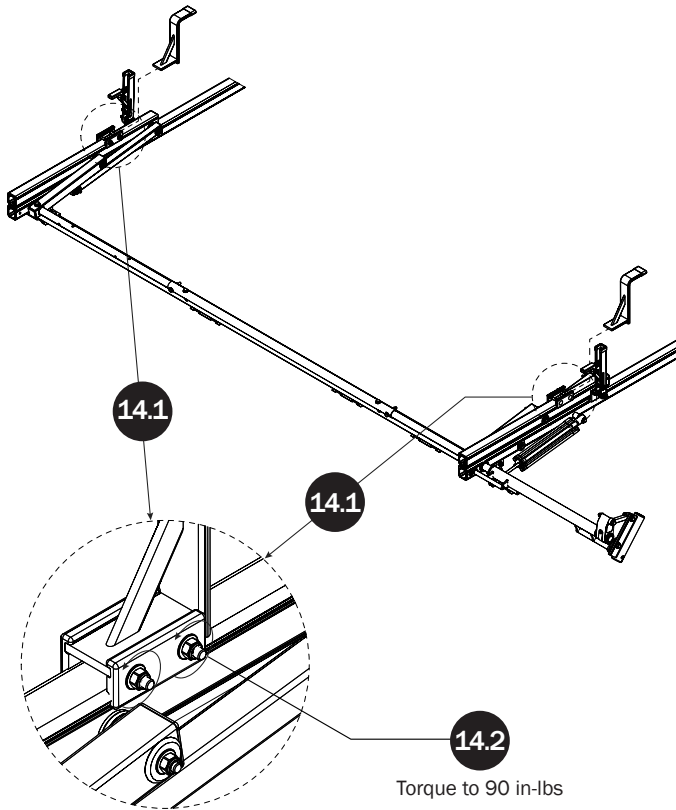**L POSTS**

SEE QUICK START GUIDE FOR ADJUSTMENTS

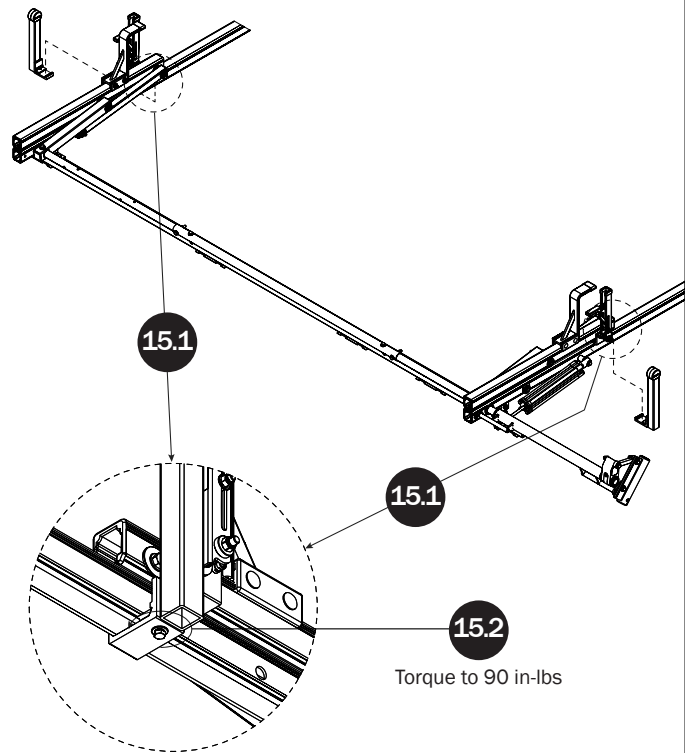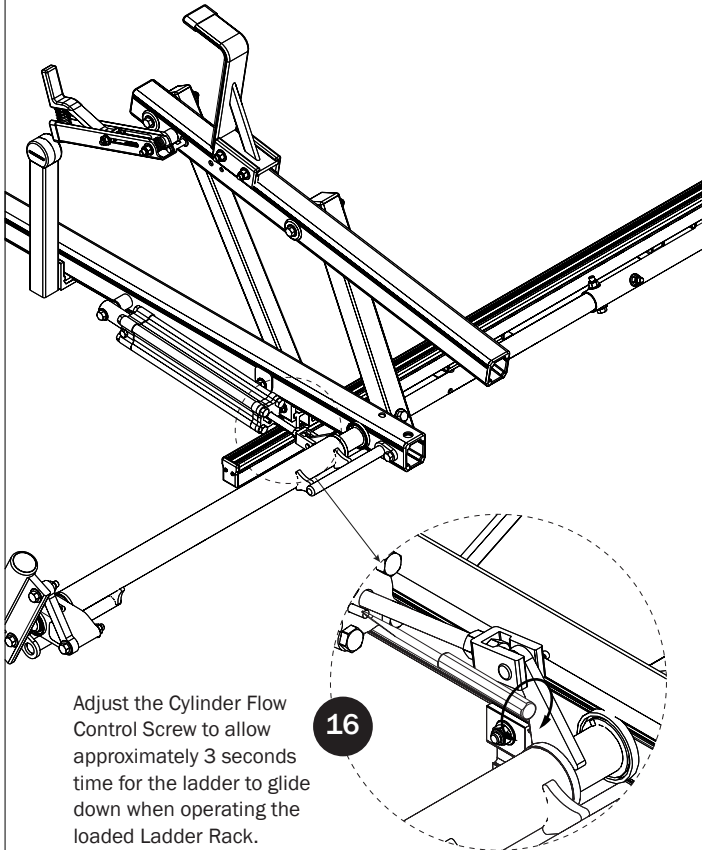**CYLINDER ADJUSTMENT**

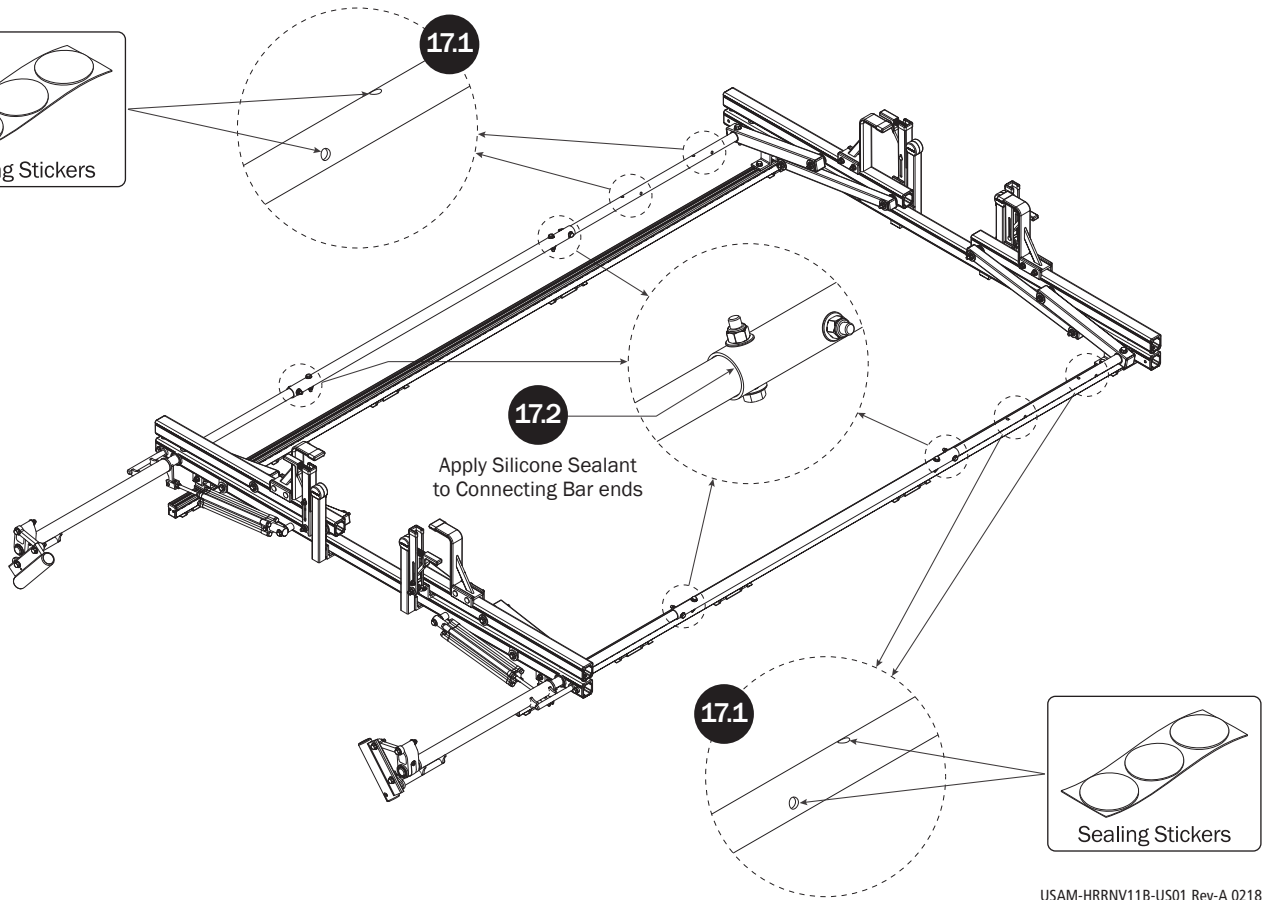DRIVE SHAFT SEALING

USAM-HRRNV11B-US01 Rev-A 0218