

ErgoRack

For Mercedes Metris

PRIME DESIGN™

A Safe Fleet Brand



PRIME TIME
Quick Ship Product

Maximize the safety and carrying capacity of your Mercedes Metris with an ErgoRack.



Easy to use

Deploys with only 2 fingers.



Improve productivity

Deploy or stow in less than 20 seconds.



Enhance Safety

Eliminates slip and fall hazards from climbing on bumper or tire.



No Drill Installation

Maintain vehicle warranty and resale value with no holes to drill.

SAFE  FLEET


Driving Safety Forward™

ErgoRack

For Ford Transit Low Roof


PRIME DESIGN[™]

A Safe Fleet Brand

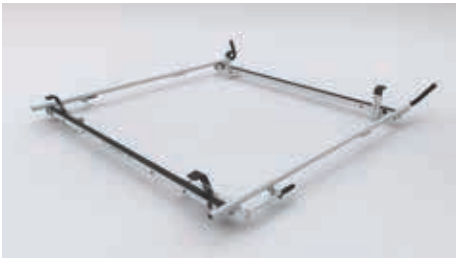

VCC-ME

Dual Clamp

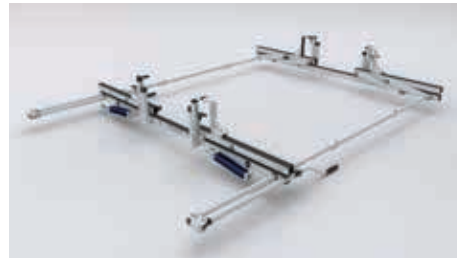

VRR-ME

Dual Rotation



VCR3-ME

Clamp / Rotation with 3rd crossbar

Models	Vehicle Wheelbase	Vehicle Height	Street side Feature	Curb side Feature	Weight
VBB-ME	126 IN or 135 IN	76 IN	End Stop	End Stop	30 lbs
VBC-ME VCB-ME	126 IN or 135 IN	76 IN	End Stop	Clamp	45 lbs
VBR-ME VRB-ME	126 IN or 135 IN	76 IN	End Stop	Rotation	78 lbs
VCC-ME	126 IN or 135 IN	76 IN	Clamp	Clamp	60 lbs
VCR-ME VRC-ME	126 IN or 135 IN	76 IN	Clamp	Rotation	69 lbs
VRR-ME	126 IN or 135 IN	76 IN	Rotation	Rotation	78 lbs
VCR3-ME* VRC3-ME*	126 IN or 135 IN	76 IN	Clamp	Rotation	102 lbs
VRR3-ME*	126 IN or 135 IN	76 IN	Rotation	Rotation	130 lbs

*Three crossbar rack

Notes:

Crossbar spacing and the vehicle's wheelbase length will dictate the ladders that can be carried.

Crossbars can be spaced at five, six, seven, or eight feet.

A 3rd crossbar can be spaced four, five, six, or seven feet.

If carrying a long extension ladder and a short step ladder, a three crossbar rack is suggested.

Contact Prime Design customer service for application specific questions.

Check the vehicle manufacturer's recommendation for roof capacity weight limits.

A wide range of accessories are available including conduit carriers, light holders, and more.

Van Crossbar Spacing and Ladder Size Guide

Crossbar Spacing	Step Ladder Size	Extension Ladder Size
4 ft Spacing	6 – 8 ft.	16 – 20 ft.
5 ft Spacing	8 – 10 ft.	16 – 24 ft.
6 ft Spacing	8 – 12 ft. [†]	16 – 28 ft.
7 ft Spacing	10 – 12 ft. [†]	20 – 32 ft.
8 ft Spacing	10 – 12 ft. [†]	20 – 36 ft.

[†]12 ft. step ladders may require an extended upper add-on component.



Quick Ship Product

ML-7.2-4057 / Rev G / 2-26-2020

Copyright ©2020 Safe Fleet and its subsidiaries. All rights reserved. No part of this publication may be reproduced by any means without written permission from Safe Fleet. The information in this publication is believed to be accurate. However, Safe Fleet does not make any representation or warranty to that effect and does not assume responsibility for any consequences resulting from use of such information. Revisions or new editions of the publication may be issued (or not issued) in our discretion to incorporate such changes.

1.877.630.7366
safefleet.net

