

UXR-0020

Utility Right Hand Rotation
Dimensional Specifications on Page 2

Configuration as shown:


Rotation Assembly w/ 26" Ratcheting Handle
UTB-2032 11" Standing Utility Mounts
HKT-0122 Mounting Hardware
Finish: White Powder Coat
Rack Weight (empty): 46 lbs

ErgoRack—Load specifications:

NOTE: Rotation Configurations: 12 ft. step ladders require an extended upper add-on component.

Check vehicle manufacturer recommendations for roof capacity weight limits.

| CROSSBAR SPACING | STEP LADDER | EXT. LADDER |
|------------------|--------------|-------------|
| 4 ft Spacing | 6 – 8 ft. | 16 – 20 ft. |
| 5 ft Spacing | 8 – 10 ft. | 16 – 24 ft. |
| 6 ft Spacing | 8 – 12 ft.† | 16 – 28 ft. |
| 7 ft Spacing | 10 – 12 ft.† | 20 – 32 ft. |
| 8 ft Spacing | 10 – 12 ft.† | 20 – 36 ft. |

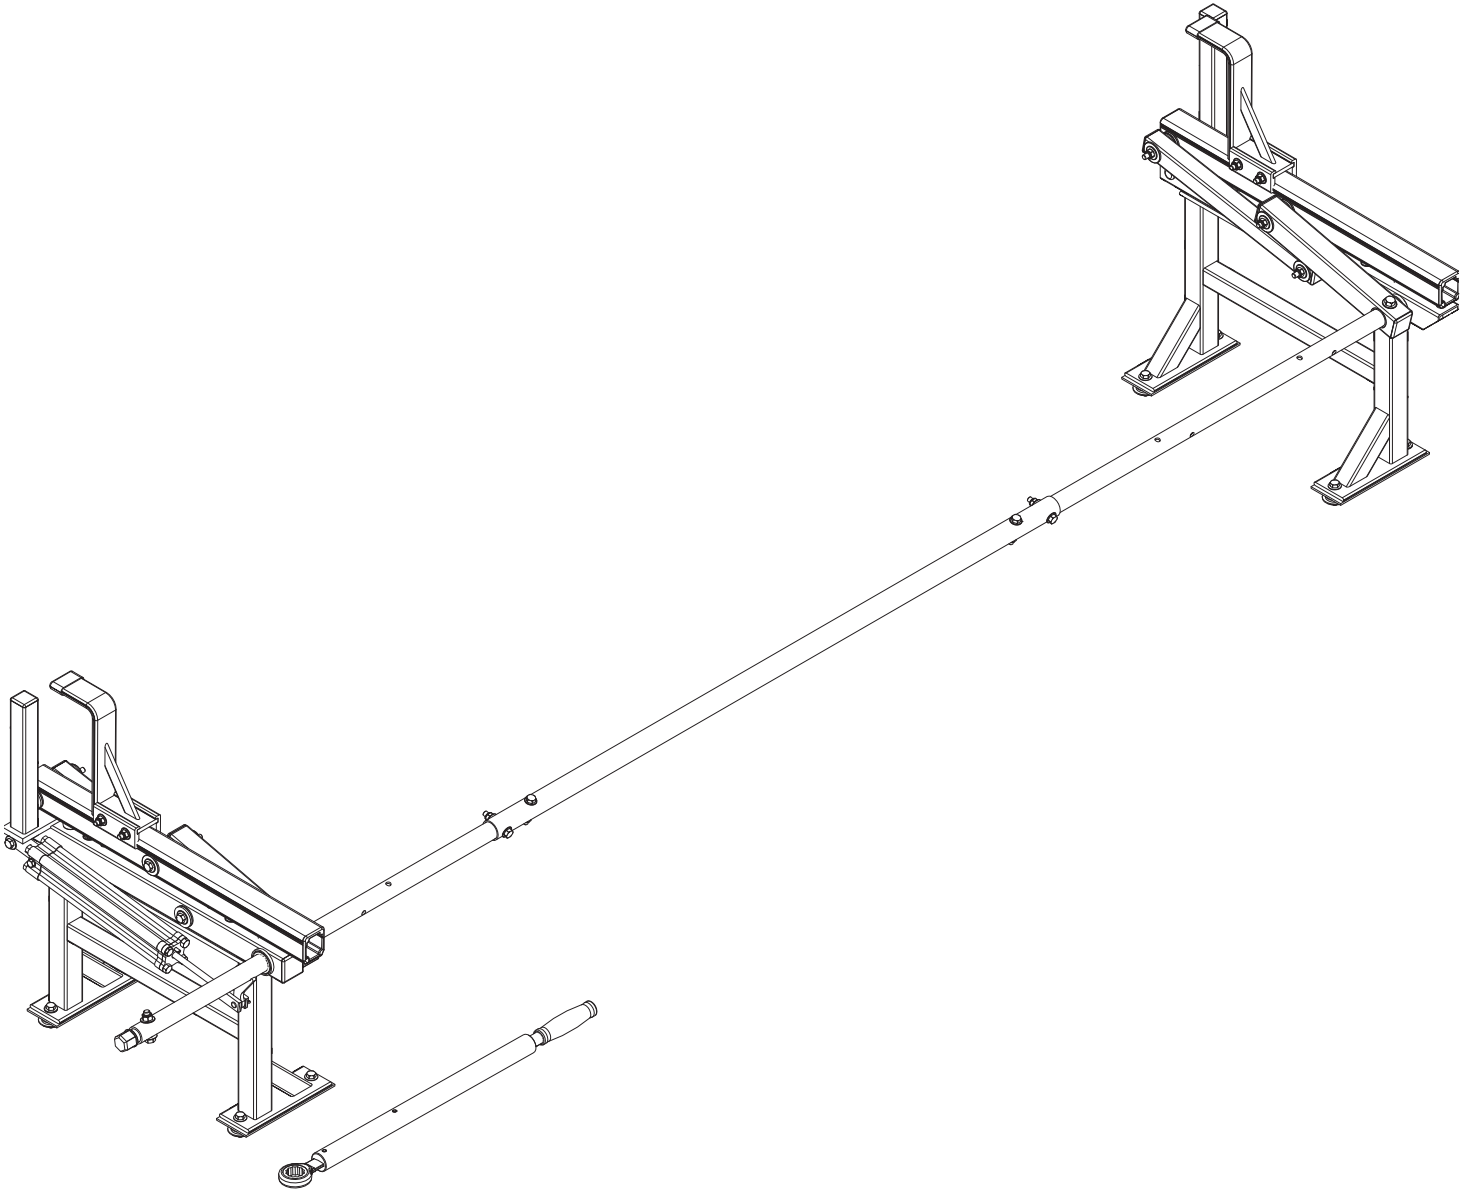


UXR-0020

Utility Right Hand Rotation

Approximate dimensions as shown:

| | |
|----------------------------|----------|
| A: Width | 24" |
| B: Mount Spacing L/R | 16" |
| C: Length | 76"–112" |
| D: Offset* | 13" |
| E: Crossbar Spacing | 5'–8' |
| F: Height | 24" |
| G: Mount Spacing R/F | 56"–93" |

* The rear drive shaft must not extend past the vehicle bumper. (See Offset)

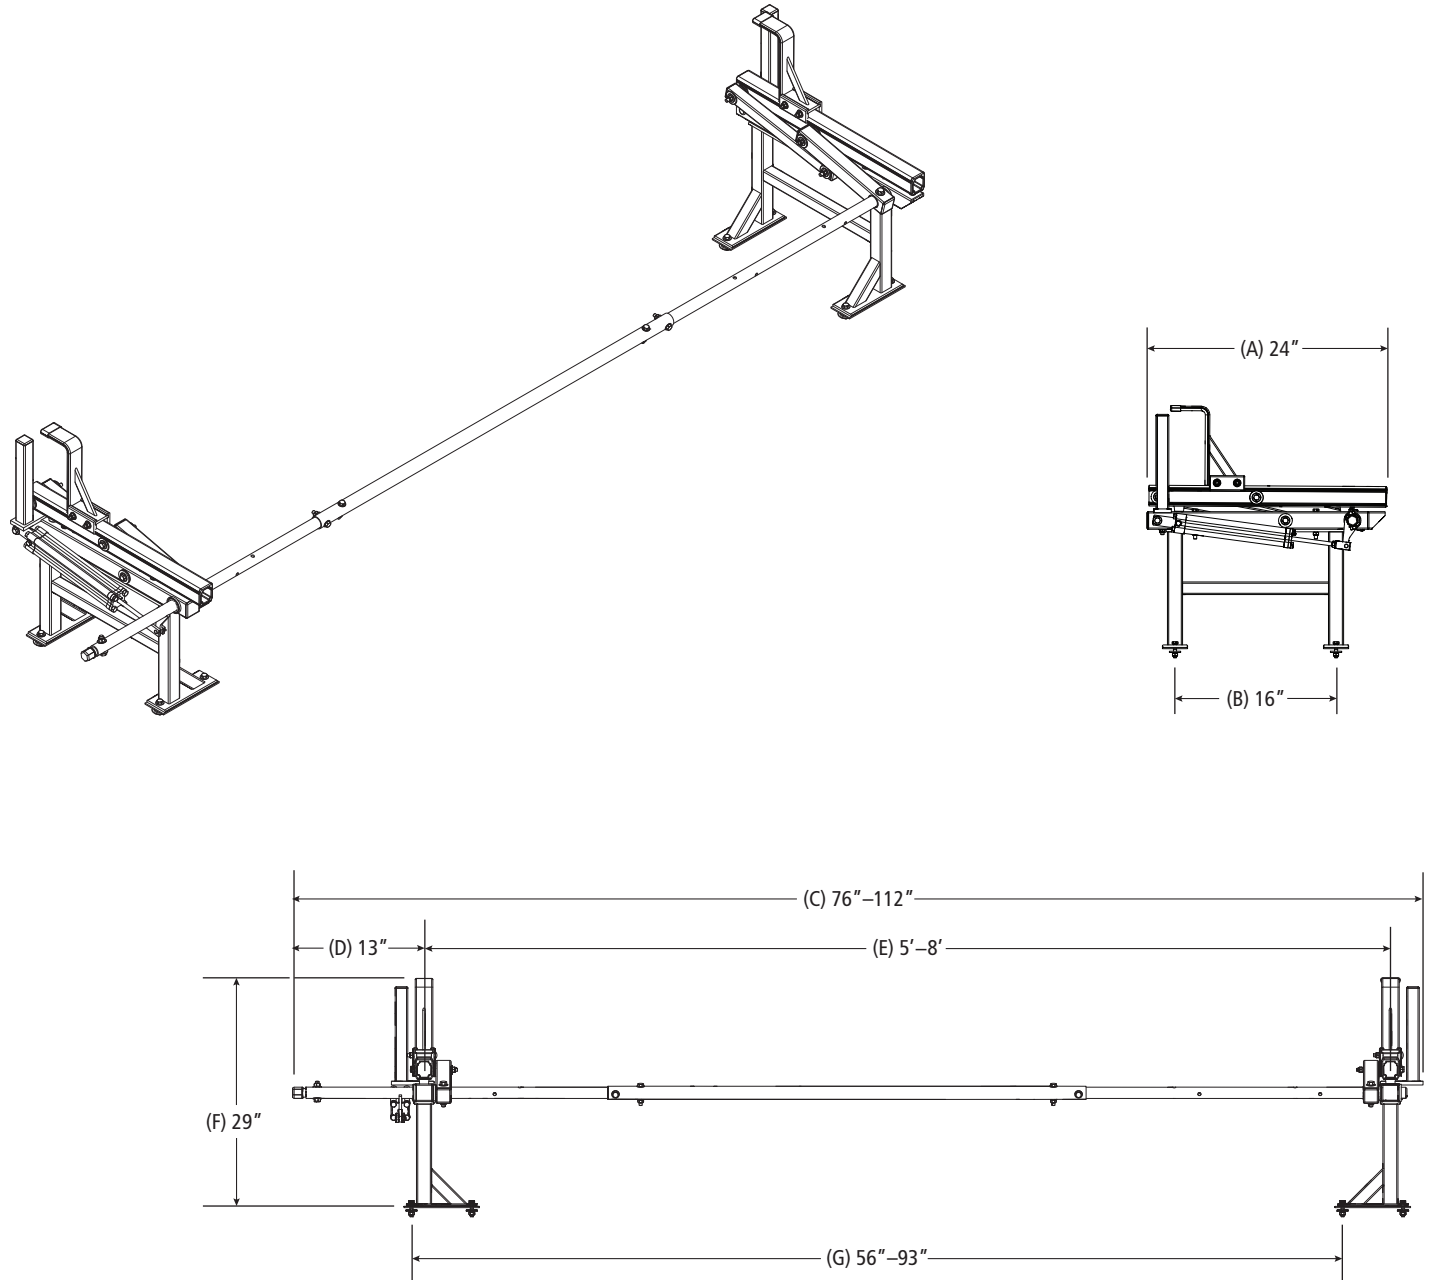

Assembly Manual also available:

UXR-0020

USOV-UXR0020-US01 Rev-A 0921