## PRIME DESIGN

A Safe Fleet Brand

## VCR3-FT-M

### ErgoRack, Ford Transit Low Roof

Three Crossbars, Powder Coat Finish Rack Weight (empty): 90 lbs

\*Callouts in this Configuration Overview indicate full module assemblies only.

For details on individual parts, please refer to the linked Module Overviews below.

A:	FEA-0008 Clamp Down Assembly
	FBM-1017-BLK Mounting System
C:	CBR-0005 Crossbar Assembly
D:	CBR-0006 Crossbar Assembly
	FEA-0002 Rotation Assembly
	EA-0015 Rotation Driveshaft Feature

Modular Assembly Manuals


### ErgoRack Van—Load specifications:

Check vehicle manufacturer recommendations for roof capacity weight limits.

CROSSBAR SPACING	STEP LADDER	EXT. LADDER
4 ft Spacing	6 – 8 ft.	16 – 20 ft.
5 ft Spacing	8 – 10 ft.	16 – 24 ft.
6 ft Spacing	8 – 12 ft. <sup>+</sup>	16 – 28 ft.
7 ft Spacing	10 – 12 ft. <sup>†</sup>	20 – 32 ft.
8 ft Spacing	10 – 12 ft.†	20 – 36 ft.

<sup>†</sup>Rotation Configurations: 12 ft. step ladders require an extended upper add—on component.

\*Example shown with 130" Wheelbase Configuration

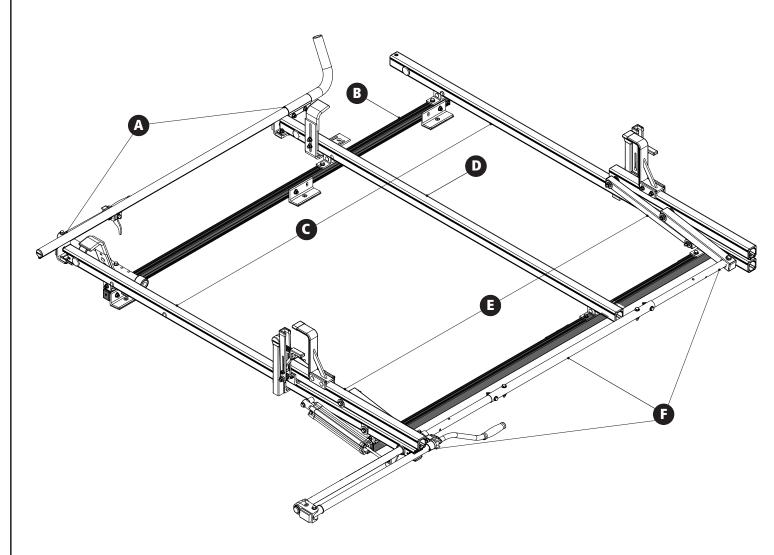

PRIME DESIGN, A SAFE FLEET BRAND - Address: 580 Opperman Drive, Eagan, MN 55123 - Toll Free: 1.8.PRIME.RACK - Fax: 651-552-1799 - Email: info@primedesign.net - Website: www.primedesign.net - TM & © 2022 PRIME DESIGN. PROTECTED BY ONE OR MORE OF THE FOLLOWING PATENT NO.'s 6764268, 6971563, 8511525, 8991889, 9102482, 9415726, 9481314, 9506292, 9776476, 9796340, 10470565, 10486608, 10501022, 10578182, 10654420, 10688937, 10836312 AND OTHER PATENTS PENDING

## PRIME DESIGN

A Safe Fleet Brand

## VCR3-FT-M

# ErgoRack, Ford Transit Low Roof Approximate dimensions as shown:

### All Wheelbases

A: Rack Width	82"
B: Rack Height	16"
C: Rear Crossbar Offset (Left)	10.25"
D: Mount Bolt Spacing L/R	54"

### 130" Wheelbase

E: Crossbar Spacing (rear to center)4'
F: Crossbar Spacing (center to front)2'
G: Total Crossbar Spacing6'
H: Rack Length100"

### 148" Wheelbase

I: Crossbar Spacing (rear to center)4	,
J: Crossbar Spacing (center to front)*2'-4	,
K: Total Crossbar Spacing*6–8	,
L: Rack Length121"	,

\*5' Connecting Bars (sold separately) are required for spacings that exceed 6'—contact Sales & Service.

3' Connecting Bar (Included in current configuration)

# Compatible Accessories Available (Sold Separately)

5' Rotation Connecting Bar	FEA-0022
Rear Access Ladder	
WorkPro LED Lighting	LED Series
Systems and Safety Components	
Safety monitoring	DS2 Series

driveshaft [ rear mount Rear Drive Shaft Offset: 24" Note: The end of the driveshaft must not extend beyond the vehicle bumper bumper All Wheelbases 130" Wheelbase 148" Wheelbase

PRIME DESIGN, A SAFE FLEET BRAND • Address: 580 Opperman Drive, Eagan, MN 55123 • Toll Free: 1.8.PRIME.RACK • Fax: 651-552-1799 • Email: info@primedesign.net • Website: www.primedesign.net • TM & © 2022 PRIME DESIGN. PROTECTED BY ONE OR MORE OF THE FOLLOWING PATENT NO.'s 6764268, 6971563, 8511525, 8991889, 9102482, 9415726, 9481314, 9506292, 9776476, 9796340, 10470565, 10486608, 10501022, 10578182, 10654420, 10688937, 10836312 AND OTHER PATENTS PENDING

<sup>5&#</sup>x27; Connecting Bar (Sold separately)