

ErgoRack®

For Enclosed Service Body

PRIME DESIGN™

ErgoRack eliminates the strain from unloading and stowing heavy ladders onto work vehicles.

This regularly performed operation can get cumbersome, especially when factoring in ladder weights, ladder lengths, operator body types, and vehicle heights. Quite often, a worker takes the unnecessary risk of climbing on a vehicle's tire or bumper to complete this task.



■ Easy to use

Make unloading and stowing heavy ladders from a vehicle's roof easy and with less strain.

■ Enhance Safety

Ladder deployed to operator versus climbing on bumper or tire which eliminates slip and fall hazards.


■ Improve productivity

Deploy or stow in less than 20 seconds.

■ No Drill Installation

Maintain vehicle warranty and resale value with no holes to drill.

Features:



Ergonomically Designed



Hydraulically Dampened Descent



Auto Clamped



Easy Compatibility



Built-In Security




Built for Efficiency



Customizable Configurations

TO LEARN MORE VISIT: PRIMEDESIGN.NET/PRODUCTS/ERGORACK/ OR SCAN THE QR CODE



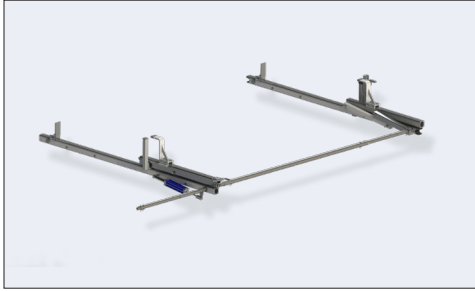

BR-UM3-84-M
Single Rotation with Slide



RR-UM3-84-M
Dual Rotation with Slides



RR3-UM3-84-M
Dual Rotation with Slides

Models Width	Body Width	Ground to Roof Height	Street Side Feature	Curb Side Feature	Weight
BR-UM3-68-M	64 -70"	7 ft or Higher	End Stop	Rotation w/ Slide	89 lbs.
RR-UM3-68-M	64 -70"	7 ft or Higher	Rotation w/ Slide	Rotation w/ Slide	144 lbs.
RR3-UM3-68-M	64 -70"	7 ft or Higher	Rotation w/ Slide	Rotation w/ Slide	162 lbs.
BR-UM3-72-M	68 -74"	7 ft or Higher	End Stop	Rotation w/ Slide	90 lbs.
RR-UM3-72-M	68 -74"	7 ft or Higher	Rotation w/ Slide	Rotation w/ Slide	145 lbs.
RR3-UM3-72-M	68 -74"	7 ft or Higher	Rotation w/ Slide	Rotation w/ Slide	161 lbs.
BR-UM3-78-M	74 – 80"	7 ft or Higher	End Stop	Rotation w/ Slide	91 lbs.
RR-UM3-78-M	74 – 80"	7 ft or Higher	Rotation w/ Slide	Rotation w/ Slide	146 lbs.
RR3-UM3-78-M	74 – 80"	7 ft or Higher	Rotation w/ Slide	Rotation w/ Slide	164 lbs.
BR-UM3-84-M	80 – 86"	7 ft or Higher	End Stop	Rotation w/ Slide	92 lbs.
RR-UM3-84-M	80 – 86"	7 ft or Higher	Rotation w/ Slide	Rotation w/ Slide	147 lbs.
RR3-UM3-84-M	80 – 86"	7 ft or Higher	Rotation w/ Slide	Rotation w/ Slide	162 lbs.
BR-UM3-90-M	86 - 92"	7 ft or Higher	End Stop	Rotation w/ Slide	93 lbs.
RR-UM3-90-M	86 - 92"	7 ft or Higher	Rotation w/ Slide	Rotation w/ Slide	148 lbs.
RR3-UM3-90-M	86 - 92"	7 ft or Higher	Rotation w/ Slide	Rotation w/ Slide	164 lbs.
BR-UM3-99-M	96 -102"	7 ft or Higher	End Stop	Rotation w/ Slide	94 lbs.
RR-UM3-99-M	96 -102"	7 ft or Higher	Rotation w/ Slide	Rotation w/ Slide	149 lbs.
RR3-UM3-99-M	96 -102"	7 ft or Higher	Rotation w/ Slide	Rotation w/ Slide	168 lbs.

Notes:

- For rotation style ladder racks, crossbars can be spaced at 1-foot increments from 5 feet up to 8 feet.
- Review the crossbar spacing and ladder size guide chart below.
- For step ladders longer than 10 feet, an optional extended rear upper with slide is recommended.[*]
- Check the vehicle manufacturer's recommendation for the roof capacity weight limit.
- Contact Prime Design customer service for application specific questions.

Van Crossbar Spacing and Ladder Size Guide

Crossbar Spacing	Step Ladder Size	Extension Ladder Size
4 ft spacing	6 – 8 ft.	16 – 20 ft.
5 ft spacing	8 – 10 ft.	16 – 24 ft.
6 ft spacing	8 – 12 ft.*	16 – 28 ft.
7 ft spacing	10 – 12 ft.*	20 – 32 ft.
8 ft spacing	10 – 12 ft.*	20 – 36 ft.

*12 ft. step ladders may require an extended upper add-on component